



G_P Model - Micrometer Adjustable Torque Wrench, Plastic Handle

- Alloy steel tube for strength and durability.
- Major and Minor scales for precision torque values setting.
- Minor scale is 1/10 of increment of main scale.
- Convenient Metric or English Major Scale with English or Metric secondary scale.
- Accuracy: $\pm 4\%$ in clockwise direction from 20% to 100% of Max. Torque.
- Pull to unlock lock ring keeps selected torque secure from accidental change.
- Various kinds of heads designed for different applications:
 - GAM_P / GA_P model: Fine-tooth ratchets suitable for operation in confined spaces requiring only 8 degrees swing.
 - GMH_P model: Head holder model for standard 9x12mm, 14x18mm rectangular shank heads.



Clear Scale



1

Pull and hold
the locking ring



2

Rotate the locking ring to adjust
the torque by the other hand




3

Release the locking ring
after torque being set

100% Calibrated

Unique serial number for each torque wrench,
corresponding to the certificate of calibration

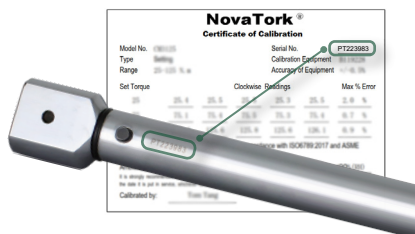

Shockproof packaging

Specially designed for all series of
"NovaTork" torque products




GAM_P

Reversible Ratchet Head G_P Torque Wrench

Bi-direction operation, 8 degrees swing, suitable for confined space

G_P (English unit)



Matching sockets

(Metric)

Item No.	Square Drive	Torque Range		Increment	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
GAM112P	1/4"	2.0-12	20-105*	0.1	290	38	0.53
GAM120P	1/4"	4.0-20	30-180*	0.2	290	38	0.53
GAM230P	3/8"	6.0-30	50-250*	0.2	318	38	0.67
GAM330P	1/2"	6.0-30	50-250*	0.2	318	38	0.67
GAM260P	3/8"	10-60	9-45	0.5	388	38	0.81
GAM360P	1/2"	10-60	9-45	0.5	388	38	0.81
GAM2100P	3/8"	20-100	15-75	1	443	38	0.89
GAM2125P	3/8"	25-125	20-90	1	443	38	0.89
GAM3100P	1/2"	20-100	15-75	1	443	38	0.89
GAM3125P	1/2"	25-125	20-90	1	443	38	0.89
GAM3200P	1/2"	40-200	30-150	1	488	40	1.09
GAM3340P	1/2"	60-340	50-250	2	528	40	1.19

*Unit is Lb.in

(English)

Item No.	Square Drive	Torque Range		Increment	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
GA1200P	1/4"	40-200*	4.0-22	1*	280	38	0.53
GA2250P	3/8"	50-250*	6.0-30	1*	315	38	0.67
GA2100P	3/8"	20-100	25-135	0.5	425	38	0.89
GA3100P	1/2"	20-100	25-135	0.5	425	38	0.89
GA3150P	1/2"	30-150	40-200	0.5	505	40	1.01
GA3250P	1/2"	50-250	70-340	1	525	40	1.15

*Unit is Lb.in

GMH_P

Rectangular Shank Head Holder G_P Torque Wrench

for 9x12, 14x18mm rectangular shank head inserts



Optional fittings:



(Metric)

Item No.	Shank Size mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
GMH912P	9x12	2.0-12	20-105*	0.1	287	38	0.43
GMH920P	9x12	4.0-20	30-180*	0.2	287	38	0.43
GMH930P	9x12	6.0-30	50-250*	0.2	306	38	0.57
GMH960P	9x12	10-60	9-45	0.5	375	38	0.71
GMH9100P	9x12	20-100	15-75	1	430	38	0.71
GMH9125P	9x12	25-125	20-90	1	430	38	0.79
GMH14200P	14x18	40-200	30-150	1	467	38	0.99
GMH14340P	14x18	60-340	50-250	2	527	38	1.09

*Unit is Lb.in

【For English unit, please contact the manufacturer】

Note: Due to the product improvement, the technical parameters are subject to variation, please refer to the actual production from the factory.