


M Model Torque Multiplier

- Alloy steel construction, long life.
- Ratio accuracy: +/-5%.
- M3.31000 has two reaction arms as an option.
- M5 / M25 series reaction arms can be adjusted according to applications.
- Above 1500Nm, the model has anti-backlash built-in, more secure to operate.

M3.31000

Torque Multiplier

Two reaction arms available as an option


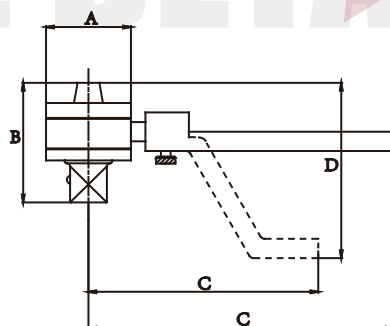


Item No.	Square Drive	Output Square Drive	Torque Range		Ratio	A mm	B mm	C mm	D mm	Tool Weight kg	Reaction Arm Weight kg
			N.m	Lb.ft							
M3.31000	1/2"	3/4"	1000	750	3.3:1	71	85	245/175	130	1.44	0.77+0.63

M5 Type

Torque Multiplier

Reaction arms can be adjusted according to applications

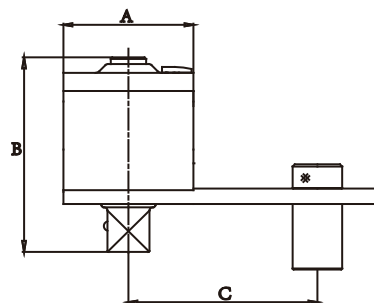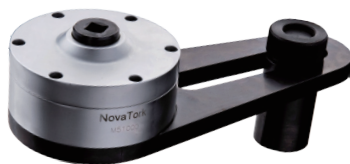


Item No.	Square Drive	Output Square Drive	Torque Range		Ratio	A mm	B mm	C mm	Tool Weight kg	Reaction Arm Weight kg
			N.m	Lb.ft						
M51000	1/2"	3/4"	1000	750	5:1	118	98	82-196	8.2	1.2
M51500	1/2"	1"	1500	1125	5:1	118	115	82-196	8.7	1.2

M25 Type

Torque Multiplier

Above 1500Nm, the model has anti-backlash built-in, more secure to operate

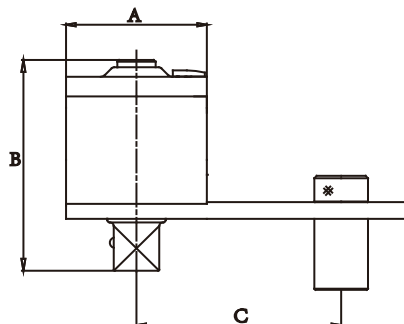

Item No.	Square Drive	Output Square Drive	Torque Range		Ratio	A mm	B mm	C mm	Tool Weight kg	Reaction Arm Weight kg
			N.m	Lb.ft						
M252500	1/2"	1"	2500	1875	25:1	118	150	82-196	10.1	1.2
M253500	1/2"	1 1/2"	3500	2600	25:1	118	164	82-196	10.3	1.2
M254000	1/2"	1 1/2"	4000	3000	25:1	118	176	82-196	11.2	1.2
M256000	1/2"	1 1/2"	6000	4500	25:1	140	214	105-254	21.3	3
M258000	1/2"	1 1/2"	8000	6000	25:1	182	228	125-294	31	3
M2510000	3/4"	1 1/2"	10000	7375	25:1	182	240	125-294	31.5	3

Note: Due to the product improvement, the technical parameters are subject to variation, please refer to the actual production from the factory.

Shockproof packaging

Specially designed for all series of "NovaTork" torque products

