



DC Model - Digi-Click Mechanical Torque Wrench

- Set Torque is displayed on back-lit LCD screen, and the increment is 0.1 of unit.
- +/- 4% accuracy in clockwise direction.
- Lowest torque value is 10% of capacity.
- Torque can be displayed in 4 different units: N.m, Lb.ft, Lb.in, Kg.cm.
- Various kinds of heads are available:
 - DCM model: Fine-tooth ratchets suitable for operation in confined spaces requiring only 8 degrees swing.
 - DCML / DCL model: Tear-shape, bi-directional ratchet heads.
 - DCMH model: Head holder for 9x12 and 14x18mm rectangular shank heads.



Backlight Display



Battery



DCM

Reversible Ratchet Head DC Torque Wrench

Bi-directional operation, 8 degrees swing, suitable for confined space



(Metric)

Item No.	Square Drive	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.ft				
DCM260	3/8"	6-60	4.5-45	0.1	382	41	1.3
DCM2100	3/8"	10-100	7.4-74	0.1	450	45	1.4
DCM3140	1/2"	14-140	10.5-105	0.1	481	45	1.45
DCM3200	1/2"	20-200	14.7-147	0.1	520	45	1.6
DCM3300	1/2"	30-300	22-220	0.1	585	45	1.8

DCML

Tear-shape Ratchet Head DC Torque Wrench

Bi-directional ratchet head, easy to use

DCL (English unit)



(Metric)

Item No.	Square Drive	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.ft				
DCML260	3/8"	6-60	4.5-45	0.1	405	41	1.3
DCML2100	3/8"	10-100	7.4-74	0.1	446	41	1.4
DCML3140	1/2"	14-140	10.5-105	0.1	485	41	1.45
DCML3200	1/2"	20-200	14.7-147	0.1	520	41	1.65
DCML3300	1/2"	30-300	22-220	0.1	568	41	1.8


(English)

Item No.	Square Drive	Torque Range		Increment	Length	Width	Weight
		Lb.ft	N.m				
DCL280	3/8"	5-80	6.8-108.5	0.1	455	45	1.45
DCL3150	1/2"	15-150	20.3-203.4	0.1	522	45	1.6
DCL3250	1/2"	25-250	33.9-339	0.1	585	45	1.8

DCMH

Rectangular Shank Head Holder DC Torque Wrench

for 9x12,14x18mm rectangular shank head inserts




(Metric)

Item No.	Shank Size	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.ft				
DCMH960	9x12	6-60	4.5-45	0.1	408	41	1.3
DCMH9100	9x12	10-100	7.4-74	0.1	431	41	1.4
DCMH14140	14x18	14-140	10.5-105	0.1	492	41	1.45
DCMH14200	14x18	20-200	14.7-147	0.1	510	41	1.5
DCMH14300	14x18	30-300	22-220	0.1	568	41	1.7

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

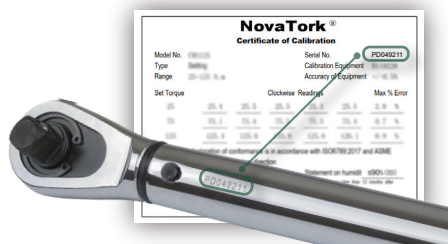

Shockproof packaging

Specially designed for all series of "NovaTork" torque products

