




		Liquid Level Switch	Art.nr. SUB-A28X-3M	
		G1" adjustable fitting, POM-C	Drawing nr.	Rev.
Approved	A.N. 240613	Scale 1:1	Date 240613	Sign. AN
		Submersible PUR-cable	Rev. date	

SUBVAKT

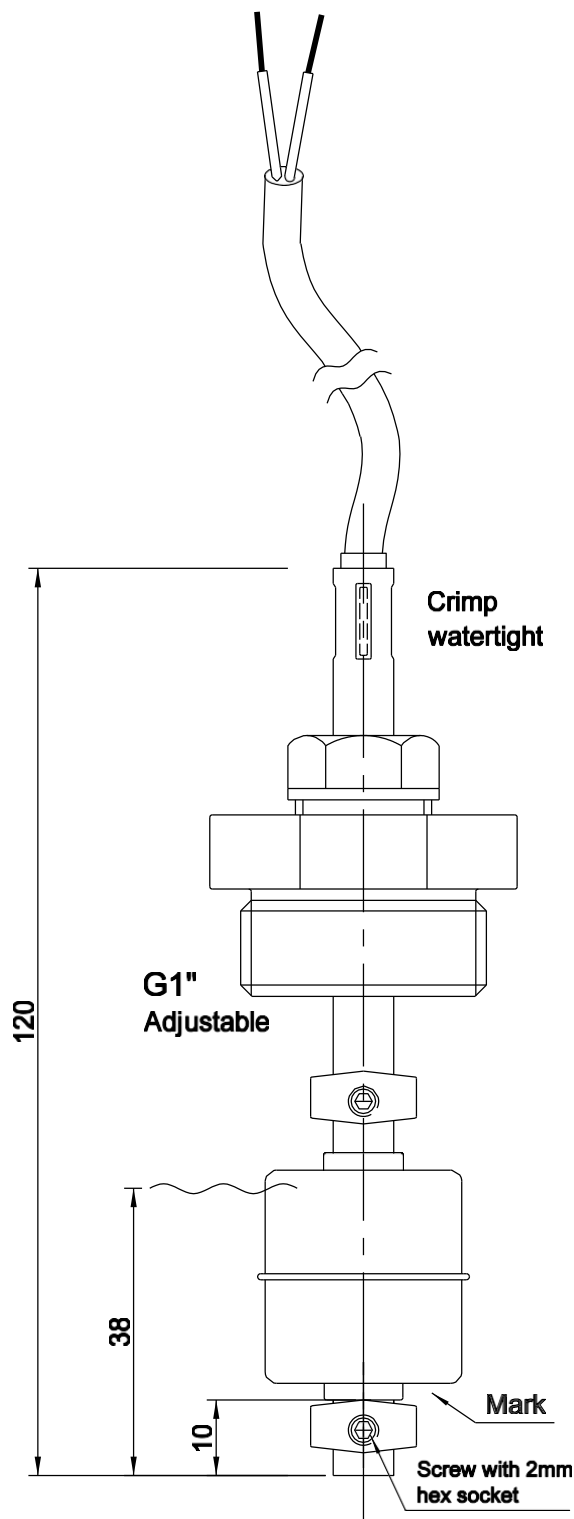

NO **NC**
mark down mark up

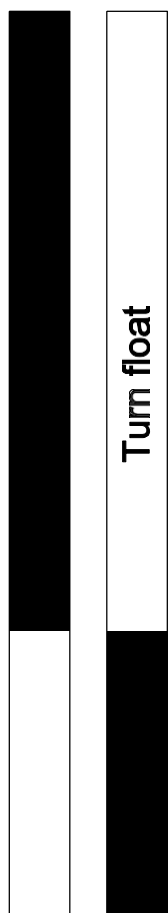

FEATURES

Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS

Probe: Ø8x120mm, SUS-316

Float Ø28mm: SUS-316, density 0,75

Fitting G1": POM C

Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²

Option: 10m, art no SUB-OPTION+10M

CONTACT FUNCTION

NO= Open kontakt at low level, close rising

Turn the float to invert the signal to NC

PROTECTION DEGREE

IP68

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load

= Switch closed

= Switch open