



		Liquid level switch, SUS-316	Art.nr. SUB-F28X-3M	
		Mounting bracket and submersible	Drawing nr.	Rev.
Approved	A.N. 240809	Scale 1:1	Date 231206	Sign. AN
		PUR-cable. High Power 70VA	Rev. date	

SUBVAKT

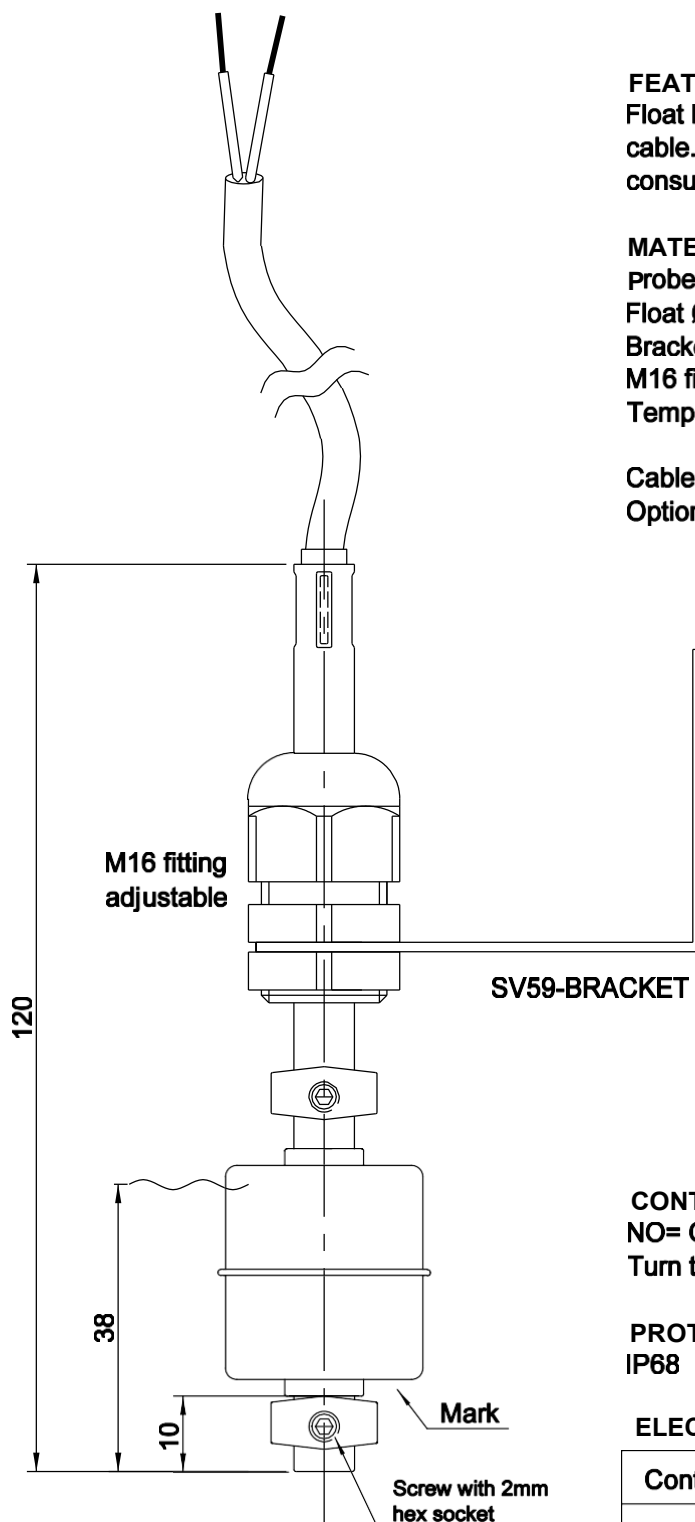

NO **NC**
mark down mark up

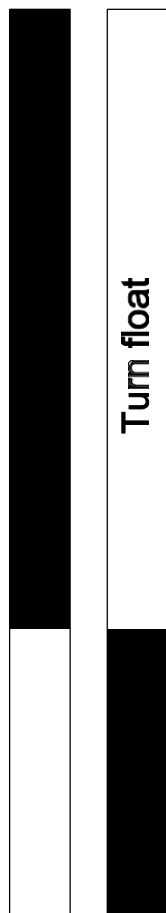

FEATURES

Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS

Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
Bracket: SUS-304
M16 fitting: PA6
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Option: 10m, art no SUB-OPTION+10M

CONTACT FUNCTION

NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE
IP68

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load

■ = Switch closed

□ = Switch open