

Beskrivningstexter/Datablad


UltraVent® Plus XS 6 2/3 E



Article number: 60.74.394

Description

The UltraVent Plus gets rid of escaping steam with its condensation technology. It is also equipped with special filter technology which reduces lingering smoke, which can build up while grilling and frying. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood. Installation is simple, and the hood can be retrofitted at any time.

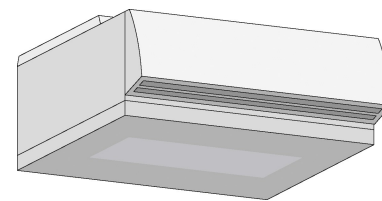

Features

- Reliably binds escaping steam and vapours thanks to the high extraction rate
- Easy-to-clean grease filter (CNS), dishwasher safe
- Proximity door contact switch
- Automatically boosts extraction rate when cooking cabinet door is opened
- Special filter technology to reduce smoke

Technical Specifications

- Connection: 230V 1 NAC 50/60 HZ
- Connected load: 155-225 W
- Air extraction rate: 280-560 m³/h
- Operating noise level is less than 67 dBA in all modes.
- Width: 657 mm
- Height: 329 mm
- Depth: 583 mm
- Weight: 30 kg
- Certifications: VDE (IEC) EN 60335-2-99, NSF

Material

- Rust-free stainless steel (CNS 1.4301)

Note

- The local standards and regulations for ventilation systems must be adhered to
- The UltraVent Plus XS condensation hood can be used for right-sided units as well as for left-sided units. An installation option for both variants is included in the scope of delivery.

