

RACESAFE FITTING GUIDE

RS2010
BODY PROTECTOR



STEP 1

The RS2010 should be fitted over light clothing with other heavier garments worn over the top.

STEP 2

Measure the chest size (A) and select an appropriate size from the size chart. Use this as a starting point for a correct fitting.

To measure the chest place the tape measure across the back, underneath the arms and then across the fullest part of the chest/bust. If the chest measurement is close to bordering sizes, select the smaller size to try initially.

STEP 3

Before trying on, loosen the side adjustments to the maximum allowance. Flex the garment to a more natural round shape if fitting straight off the peg.

Once on, insert thumbs into the armholes to bring the two sides together and to help make doing up the zip easier.

STEP 4

Tighten the side adjustments until a firm, but comfortable fit is achieved. Whether this can be achieved within the range of adjustment will determine whether a smaller or larger size is required.

STEP 5

At the front, the RS2010 should reach up to the breastbone and cover the bottom rib at mid chest by approximately 2.5cm.


The front length should not restrict movement within the range of a riding position. The garment should sit off the hips at the side and allow a full range of movement from side to side without pushing the garment up.

STEP 6

Check the back length (D) by sitting on a saddle and ensuring there is approximately a hands width between the saddle and the bottom of the RS2010. It should be possible to lean back in a balanced position without the bottom of the garment catching the saddle.

The exact back length is a personal preference and suitability will vary between disciplines.

The RS2010 Short Back option is 2.5cm shorter than the Standard Back in Child's sizes and 4cm shorter in Adult sizes.

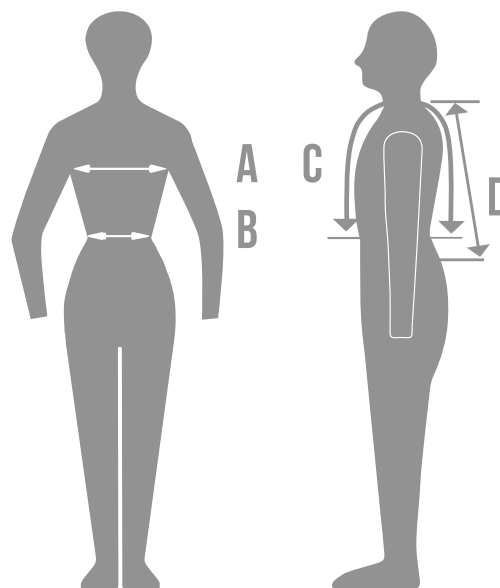

MADE TO MEASURE OPTIONS.

1. BACK LENGTH (D) TO SPECIFICATION.

If the required back length cannot be achieved by the standard sizing then the back length can be shortened or lengthened to specification.

2. REMOVE/ADD FRONT ROW OF BLOCKS.

If the required front length cannot be achieved by the standard sizing then a row of standard width blocks can be added or removed to the front.

3. TAPERED HIP.

The bottom row of blocks on the front can be tapered at the sides to raise the garment at the sides. This can prevent the garment sitting on the hips and restricting movement, particularly with Ladies.

RACESAFE LIMITED

9 Carlton Road, Wilbarston
Market Harborough, LE16 8QD.
info@hows-racesafe.co.uk
www.hows-racesafe.co.uk
+44 (0)1536 771051

