



InnoPet Buggy Adventure

item : IPS-036



PRODUCT CAPACITIES

1. Pet compartment capacity: 34kgs/75lbs
2. Storage basket capacity: 10lbs

Parts List



Stroller Frame



Front Wheel



Rear Wheels and Axle



Front Fork



Parent Tray

PUTTING IT ALL TOGETHER



Assemble wheel onto the front fork

1. Attach the front wheel onto the front wheel forks
2. Insure that the Valeo buttons on the fork are in correct position with the wheel
3. Push the front wheel onto the front forks until Valeo buttons snap into place



Assemble front fork to the frame

1. Fully open stroller frame.
2. Attach front wheel assembly to the stroller frame by inserting the two steel tubes into the front of the stroller frame.
3. Be sure valco buttons are snapped into place. (See two black arrows above.)


PUTTING IT ALL TOGETHER



3. Attach rear wheels to axle (1). Pull silver tab on wheel while inserting center of wheel onto the axle. (See arrow on picture to the left) (2). Press firmly on wheel to ensure a tight fit. (3). Repeat(1) & (2) to insert second wheel on axle.

4. Assemble rear wheel assembly to the stroller frame (1). Insert wheel assembly into both steel tubes. (2). Listen for the snap of the valco button to be sure assembly is firmly attached. (3). You can verify a secure fit by lifting up on the plastic (see arrows above) if you can see the silver colored valco buttons

5. Attach parent tray : Place parent tray on handle bar and align side holes on both sides of the tray (see arrows above) with knobs on steel tubing and snap into place.

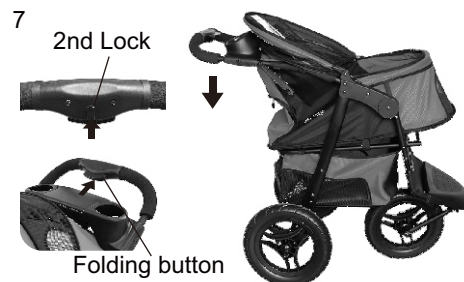

OPENING

- (1). Unlatch the plastic latch on the side of the stroller frame as seen in Figure 6.
- (2). Pull the stroller open into the upright position until it snaps locked into place.

FOLDING

- (1). Unzip the pet compartment and remove pet
- (2). Remove any items from storage basket
- (3). Using the Smart-Fold Handle Mechanism push the 2nd Lock button on the underside of the mechanism
- (4). Next while holding the Black Folding button in, squeeze the handle completely on the front of mechanism
- (5). Push the stroller handle down-ward to fold the stroller

Proper care for your new stroller

- Clean Fabric with mild household soap and warm water.
- Clean Stroller frame with mild household soap and warm water.
- If wheel squeaks or rotates with difficulty, apply light oil. (e.g.WD-40, 3-in-1, or sewing machine oil)
- Regularly check stroller for loose or missing parts.

Imported By:

InnoPet v.o.f.

Adress: Einsteinweg 53-55, IJsselstein, The Netherlands

Zipp: 3404 LJ

E-mail: info@innopet.nl