

Promo Flag Wind

Delivery specifications

PDF format

- Do not place any cutting lines or frames around the printable image.
- Convert all fonts into letter outlines.
- Remove all invisible layers from the layout.

Use of colour

- Use CMYK colours. No LAB colours.
- For the deepest black, use the following colour codes: CMYK 86/85/79/100 or RGB 0/0/0. When files with both vectors and photos (bitmaps) are used, also use these colour codes in the photos. Otherwise colour differences may arise within the images
Note: colours can deviate slightly when printed on fabric. A test print is available on special request.

Resolution


- We advise a resolution of 70 to 120 dpi (End format).
(If the image in the file has 10% of the size of the end format, the image in the file must have a resolution of 700 to 1200 dpi)

Dimensioning

- We always communicate in the sequence width first, then height (w x h).
- Files delivered in the correct ratio (w x h) will automatically be scaled to the requested format.
- Deviations in the ratio (w x h) up to 1.5% are automatically adjusted to the ordered size. If the deviation exceeds 1.5%, we will contact you.
- Image dimensions can deviate slightly due to stretch, shrinkage or the elastic properties of the material.

Promo Flag Wind

Template

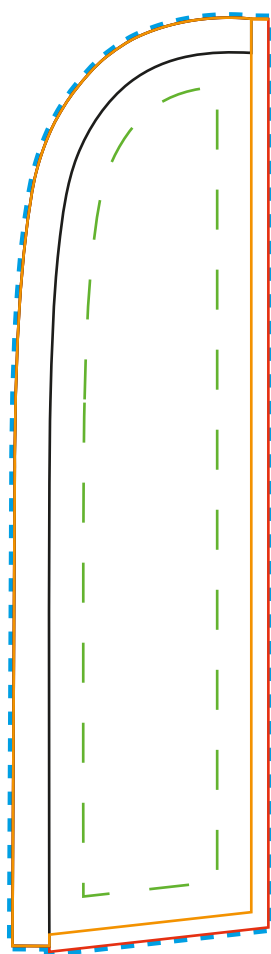

File set-up



The **blue line** is the outline of the file that is finally send through. This includes 0,5 cm bleed. The tunnel is also printed along.



Tailoring is done on the **red line**. This is the final net size.



Important text and images should be placed within the **green line** because of the confection.



Black line:
Tunnel.



Orange line:
Visible size after confection.

Sizes



42 x 163 cm


Sizes including 0,5 cm bleed



46 x 165,5 cm

Supplying of file

1. Please remove all sizes and lines (red, green, blue, orange and black).
2. Supply on real size in PDF via e-mail / WeTransfer.



PROFLAGGW

42 x 163 cm

Scale 1:10

Supply the file on:

46 x 165,5 cm