
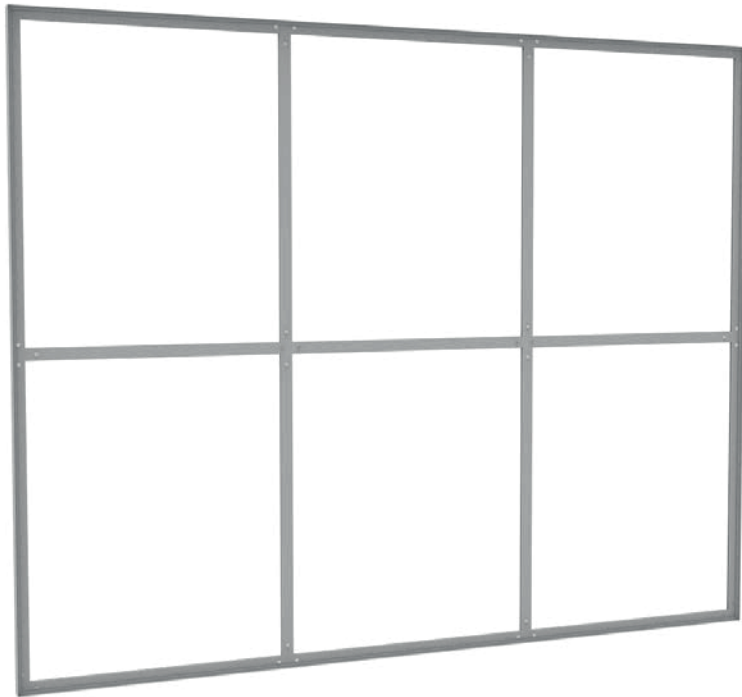


VISUALISATION

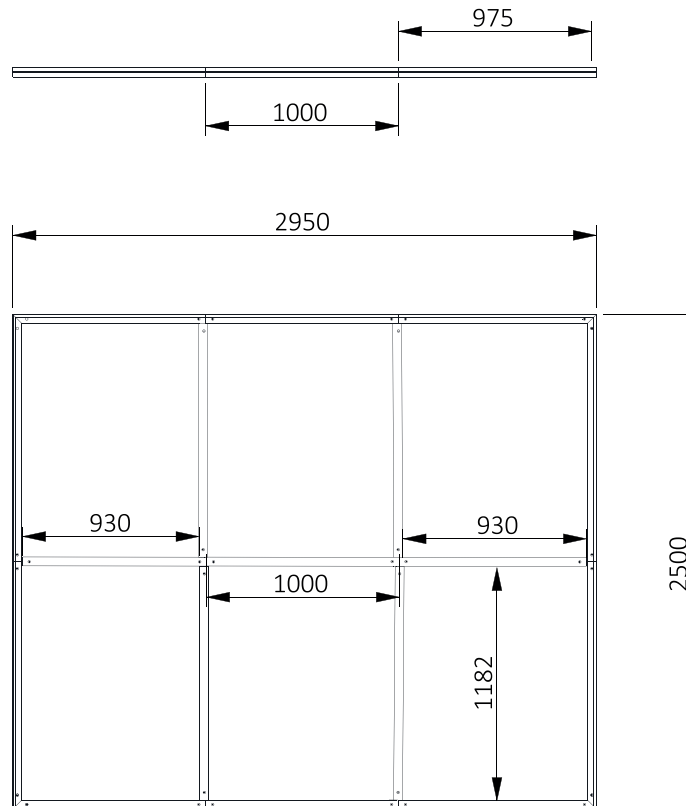

DIMENSIONS

**Module A**

- Vector to Vector fixing included

HARDWARE

2500 (h) x 2950 (w) x 50 (d) mm

19,0 kg (1 parcel)

GRAPHIC:

Visual graphic area (mm):

Graphic 2 x 2497 (h) x 2947 (w) mm net

- Ensure an allowance of 5 cm, to all sides inside the graphic, without any text or logo.
- On each side add 15 mm of bleed.


About graphic:

- We recommend to print on a stretch fabric.
- The gasket on the edge of the printed graphic should be 12x3 mm.

ADDITIONAL INFORMATION

- Standard holes on each side of the frame to connect it to a pole (provide connecting screw vector to pole ST231).
- 4 screws vector to vector (ST230) included with the vector frame.
- Maximum length of elements: 1250 mm.

BREAKDOWN

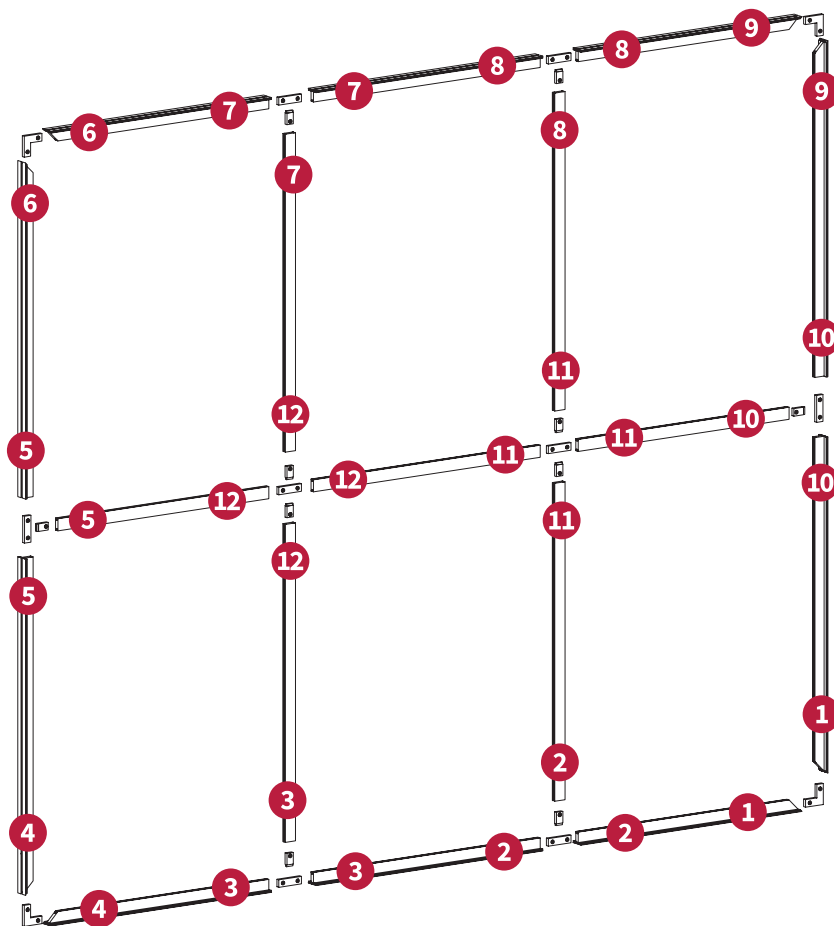

HARDWARE ELEMENTS

4 sections (LN612) 1250 mm



4 sections (LN612) 975 mm



2 sections (LN612) 1000 mm



4 vertical sections (EX605) 1182 mm + 8 locks (FX617)



2 horizontal sections (EX605) 930 mm + 2 locks (FX617)



1 horizontal section (EX605) 1000 mm



8 locks (IB2)



4 corner locks (CB9)



4 screws connecting vector to pole (ST230)

