


VISUALISATION



DIMENSIONS

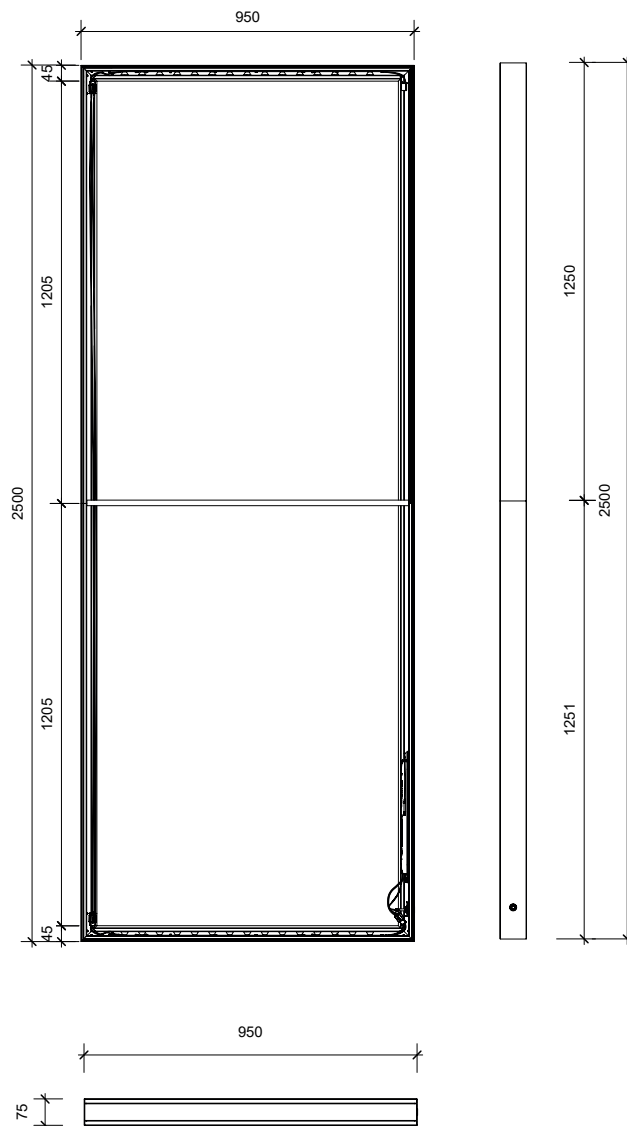

HARDWARE

2500 (h) x 950 (w) x 75 (d) mm

14,1 kg (1 parcel)

GRAPHIC:

Visual graphic area (mm):

Graphic 1 x 2497 (h) x 947 (w) mm net

- Ensure an allowance of 5 cm, to all sides inside the graphic, without any text or logo.
- On each side add 15 mm of bleed.


About graphic:

- We recommend to print on a stretch fabric.
- The gasket on the edge of the printed graphic should be 12x3 mm.

ADDITIONAL INFORMATION

- Standard holes on each side of the frame to connect it to a pole (provide connecting screw vector to pole ST231).
- 4 screws vector to vector (ST230) included with the vector frame.
- Maximum length of elements: 1250 mm.

BREAKDOWN

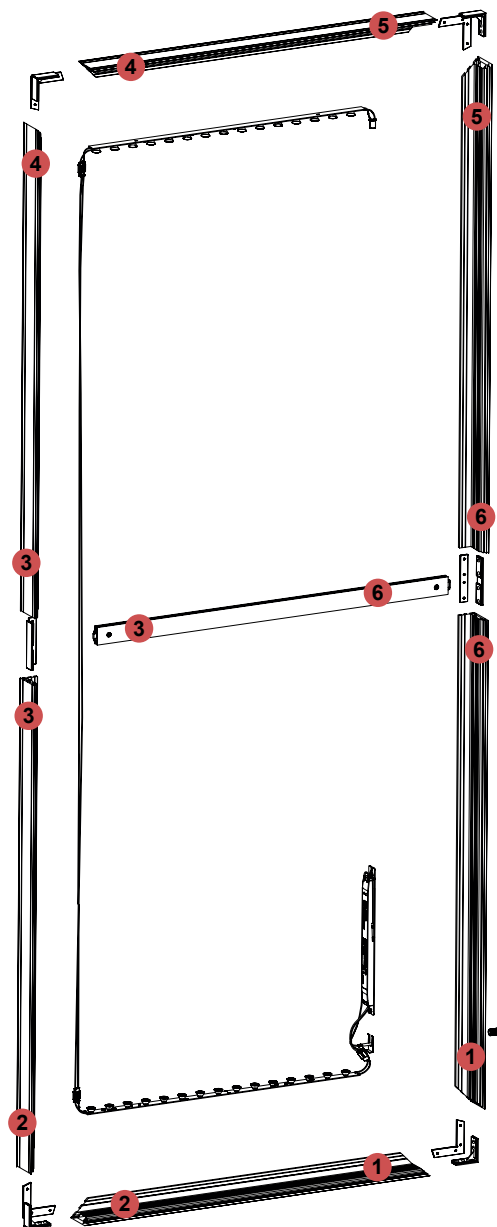

HARDWARE ELEMENTS

2 sections (EX632) 950 mm



4 sections (EX632) 1250 mm



1 section (VSPB-2000) 920 mm



2 locks (ULMO94)



4 locks (LN164)



4 corner connectors with screws (LN298)




2 locks (LN163)



2 locks (LN296)



2 led stripes (LED-RTL-18)



transformer (LED-RTL-01-120)
+ wiring (LED -RTL-13+LED-RTL-15
+LED-RTL-17+LED-RTL-10)

