


VISUALISATION

DIMENSIONS

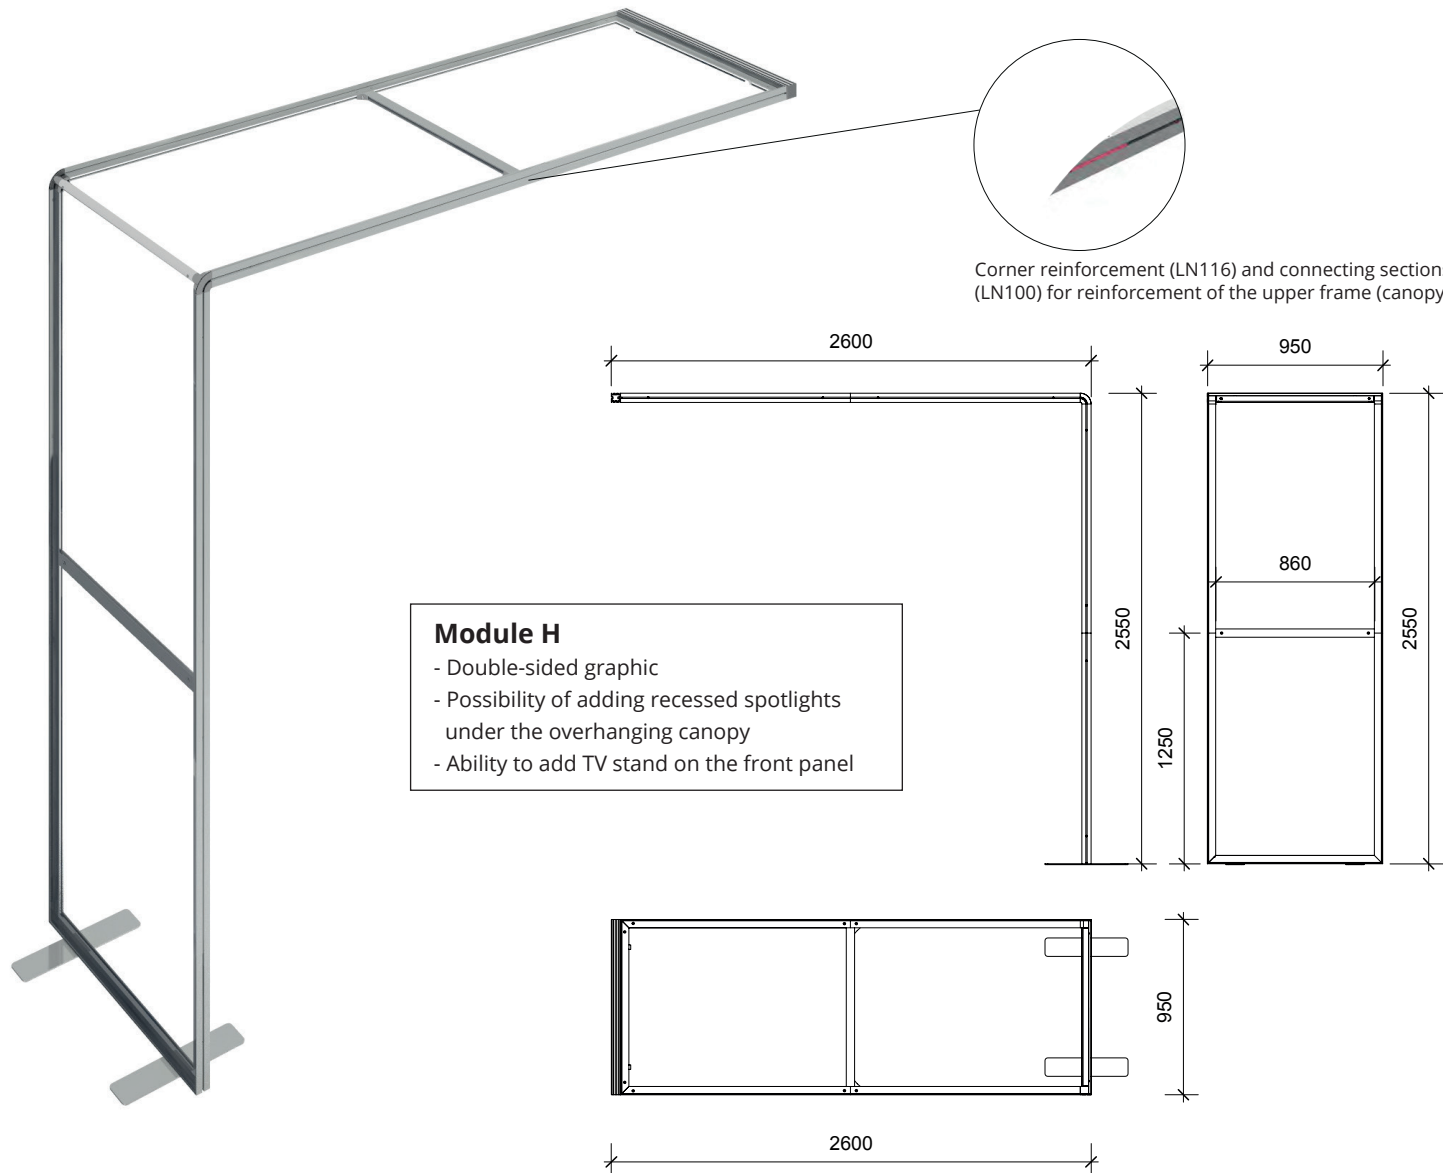

HARDWARE

2550 (h) x 950 (w) x 2600 (d) mm

19,2 kg (1 parcel)

GRAPHIC:

Visual graphic area (mm):

Graphic 1 x 5239 (h) x 947 (w) mm net
 Graphic 1 x 5161 (h) x 947 (w) mm net

- Ensure an allowance of 5 cm, to all sides inside the graphic, without any text or logo.
- On each side add 15 mm of bleed.


About graphic:

- We recommend to print on a stretch fabric.
- The gasket on the edge of the printed graphic should be 12x3 mm.

ADDITIONAL INFORMATION

- Standard holes on each side of the frame to connect it to a pole (provide connecting screw vector to pole ST231).
- 4 screws vector to vector (ST230) included with the vector frame.
- Maximum length of elements: 1250 mm.

BREAKDOWN

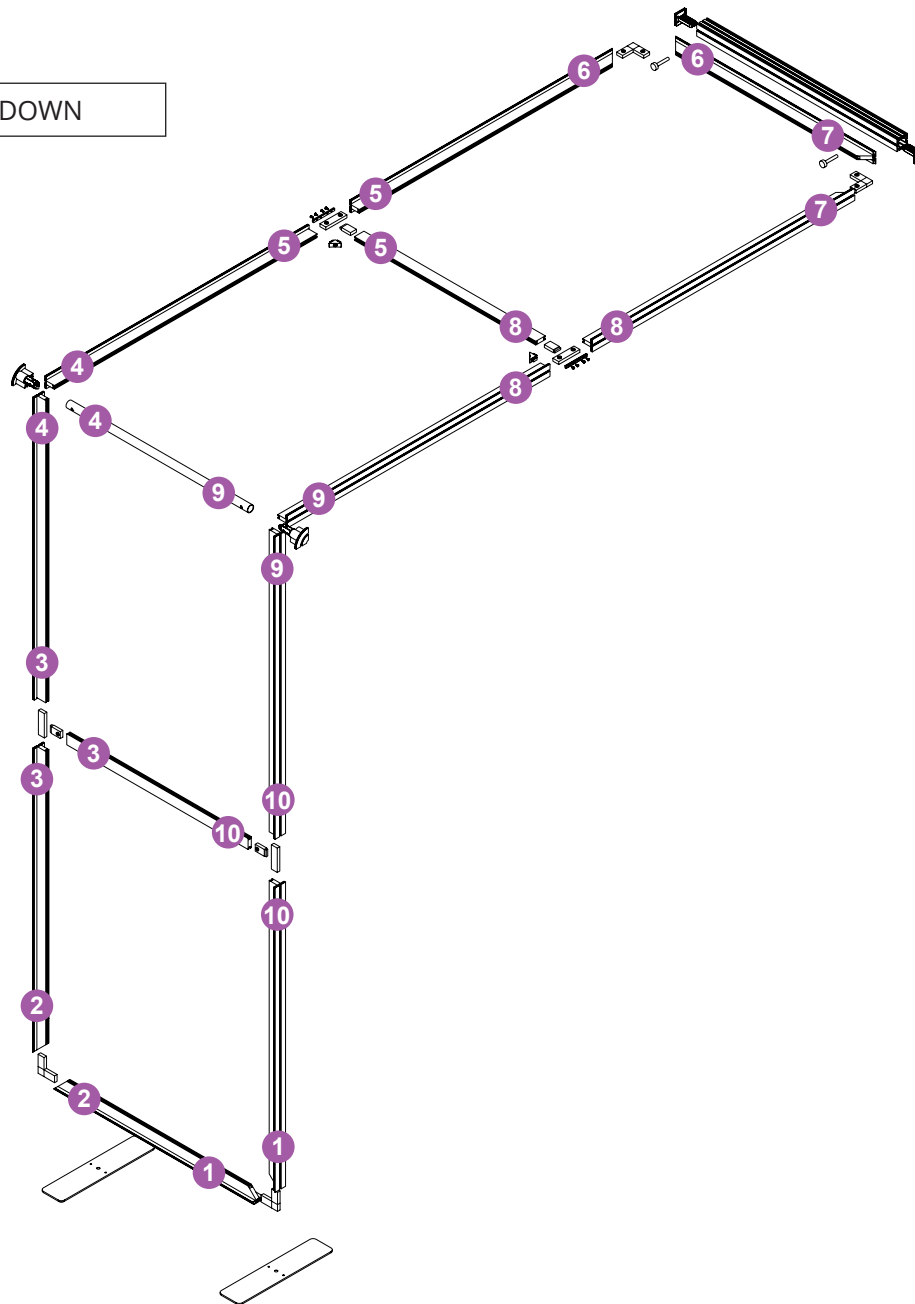

HARDWARE ELEMENTS

8 sections (LN612) 1250 mm



2 sections (LN612) 950 mm



1 square profile (LN616) 950 mm + post-frame screw



2 sections (EX605) 860 mm + 4 locks (FX617)



1 section 860 mm (EXT189)



4 locks (IB2)



4 corner locks (CB9)



2 straight connectors (CB10-R)



2 plastic top caps (LN616-TC)



4 post-frame screws (ST231)



2 feet (LN155)

