



VISUALISATION

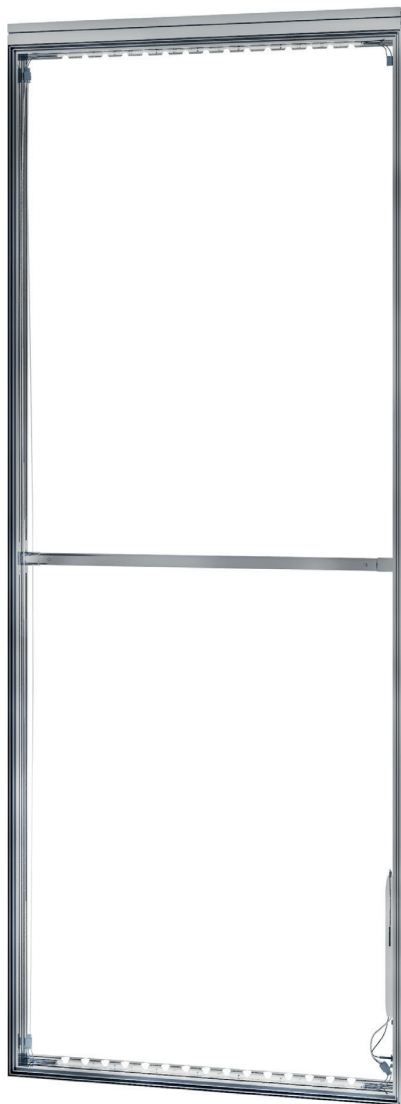

DIMENSIONS

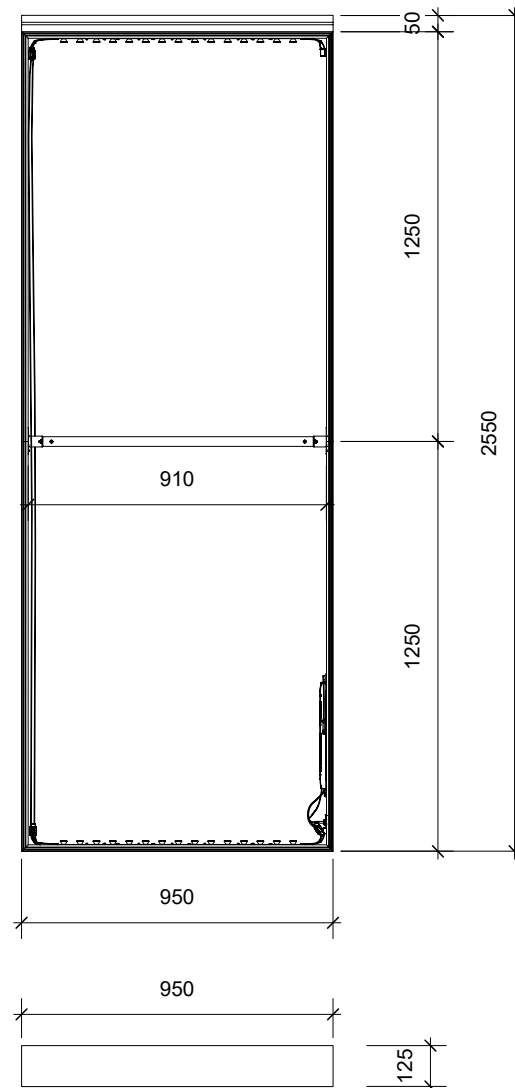

HARDWARE

2550 (h) x 950 (w) x 125 (d) mm

12,3 kg (1 parcel)

GRAPHIC:

Visual graphic area (mm):

Graphic 2 x 2547 (h) x 947 (w) mm net

- Ensure an allowance of 5 cm, to all sides inside the graphic, without any text or logo.
- On each side add 15 mm of bleed.


About graphic:

- We recommend to print on a stretch fabric.
- The gasket on the edge of the printed graphic should be 12x3 mm.

ADDITIONAL INFORMATION

- Standard holes on each side of the frame to connect it to a pole (provide connecting screw vector to pole ST231).
- 4 screws vector to vector (ST230) included with the vector frame.
- Maximum length of elements: 1250 mm.

BREAKDOWN

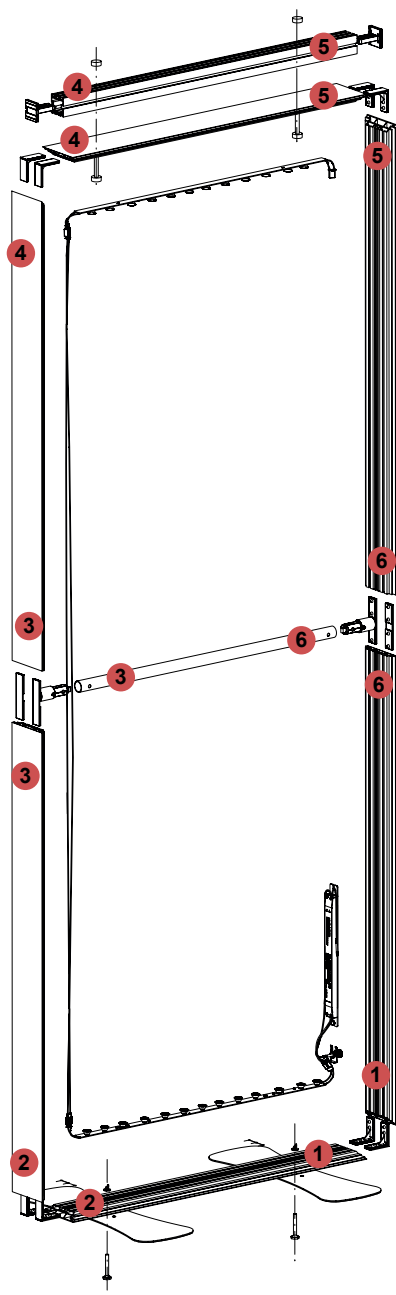

HARDWARE ELEMENTS

4 sections (EX631) 1250 mm



2 sections (EX631) 950 mm



1 square profile (EX616) 950 mm + post-frame screws



2 led stripes (LED-RTL-18) + transformer (LED-RTL-01-120) + wiring (LED -RTL-13+LED-RTL-15 +LED-RTL-17+LED-RTL-10)



1 section (EXT189-R) 824 mm



2 hybride conectors (TC-30-L) + zamek (FX617)



4 horizontal sections with screws (LN296)



8 corner connectors with screws (LN298)



6 post-frame screws (ST231)



2 plastic top caps (LN616-TC)



2 flat feet (FX295)

