



OWNER MANUAL

BR-303C


Features:

- *Car specific 2-way component speaker system
- *4" Midwoofer with paper-fibre cone and rubber surround
- *1" copper voice coil / BIMAX® spider
- *1" Aluminum dome tweeter
- *Car specific mid pass & high pass filter included
- *Klippel® optimized
- *Suitable for BMW*

***BMW is a registered trademark of Bayerische Motoren Werke AG**



BR-303C	2-way Component System	
Impedance	4 Ohm	
Frequency response	123-20kHz	
Efficiency 1W/1M	88dB	
Power Handling(RMS)	60W	
Power Handling(max)	120W	
Crossover Frequency	3500 Hz(12/oct)	
Linear Parameters(TSP)	BR-303C-MID	BR-303C-TW
Membrane Material	Paper	Aluminum
Voice Coil Diameter	1"	1"
Resistance(Re)	3.6 Ohm	3.2 Ohm
Resonance Frequency(Fs)	123 Hz	1750 Hz
Mechanical Q factor(Qms)	4.74	
Electrical Q factor(Qes)	0.92	
Total Q factor(Qts)	0.77	
Equivalent air volume Vas	1.2L	
Mechanical mass(Mms)	5.5 g	

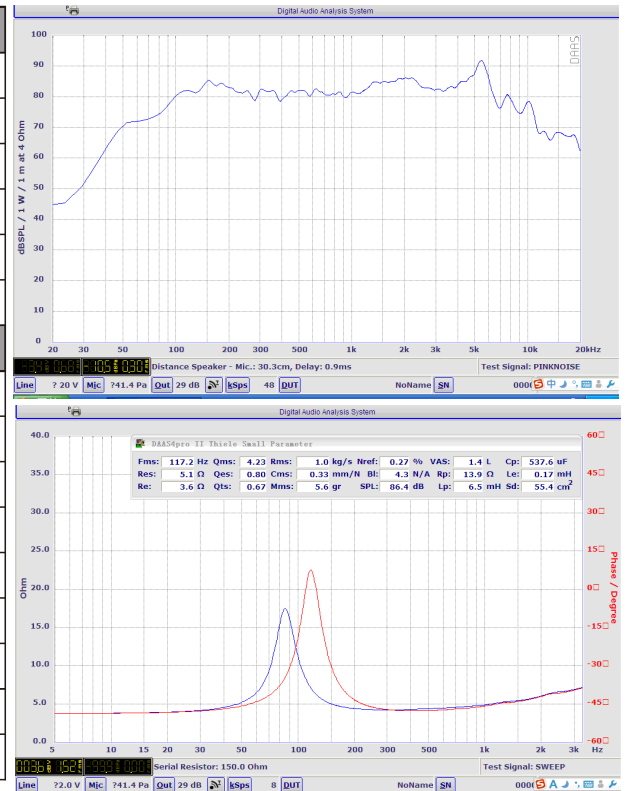



OWNER MANUAL

BR-303C

Physical Dimensions:

