




OWNER'S MANUAL

DSC-62SQ

6.5" AUDIOPHILE COMPONENT SPEAKER

Features:

- *Heavy Gauge Steel Powder Coated Basket
- *High-Energy Y30 Magnets Assures Sufficient Magnet Force Needed For High Sensitivity And Accurate Sound Reproduction
- *Aluminium Cone With Butyl Rubber Surround
- *High Quality Cloth Spider With Polyester Fibre
- *1"High Temperature KSV Voice Coil
- *25mm Silk Diaphragm Tweeter With Ferro Fluid Cooled V.C
- *Custom Competition Grade 12dB Crossover With Dragster Logo(Kit)

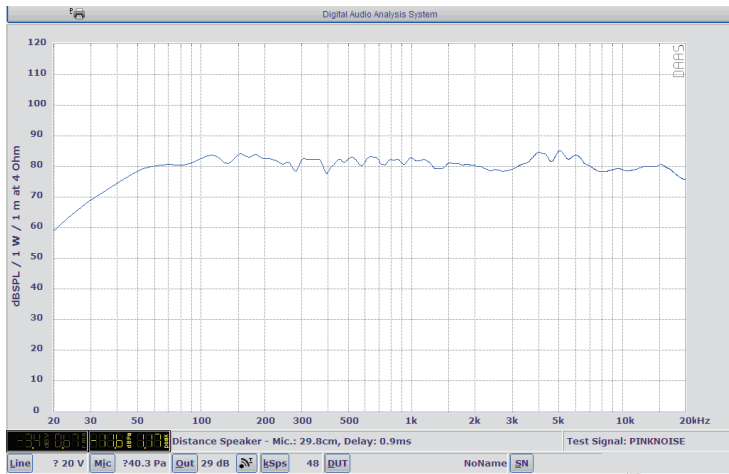

Model	DSC-62SQ
Impedance	4 Ohm
Frequency response	49-20kHz
Efficiency 1W/1M	87dB
Power Handling(RMS)	80W
Power Handling(max)	150W
Linear Parameters(TSP)	
Membrane Material	Aluminium cone
Voice Coil Diameter	1"
Resistance(Re)	3.6 Ohm
Resonance Frequency(Fs)	48 Hz
Mechanical Q factor(Qms)	5.75
Electrical Q factor(Qes)	0.64
Total Q factor(Qts)	0.58
Equivalent air volume Vas	18.0L
Mechanical mass(Mms)	14.0g

