




Montanari Group


GEARLESS&GEARBOX
TRACTION MACHINES

GEARLESS

MGV20L

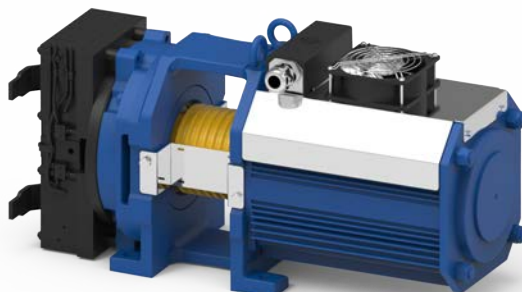

Carico Statico
Static Load
Charge Statique
Statische Belastung
Carga Estática

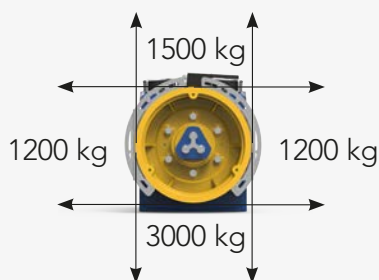

Peso
Weight
Poids
Gewicht
Peso


149 kg

Momento Torcente Nominal Torque Torsions moment Drehmoment Par de Torsión	Coppia di corto circuito Short circuited torque Couple court-circuité Drehmoment kurzgeschlossen Par cortocircuitado	Poli Poles Poles Pole Polos	Encoder	Cavo motore Motor Cable Câble du moteur Motor Kabel Cable para motor
Nm	Nm			m
265 40% ED 180 s/h	300	20	Endat Sincos SSI BISS	7
Freno - Brake - Frein - Bremse - Freno				
RTW250 [2x250Nm] 2X79W - 207V _{DC}				




MORE ON
OUR WEBSITE



MGV20L

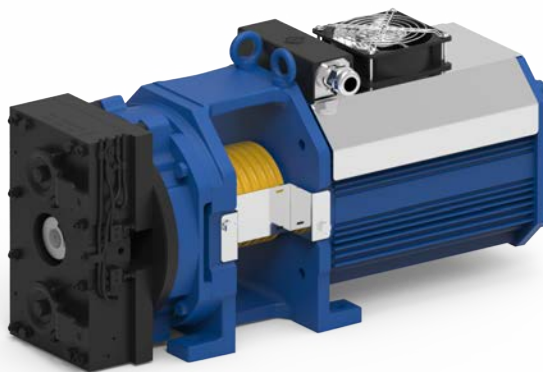

	Funi - Ropes - Cables Seilen - Cables		
ØD	Ø	min - max	Pitch
mm	mm	n°	mm
120	6 - 6,5	3 - 8	12
160			
210			
240			

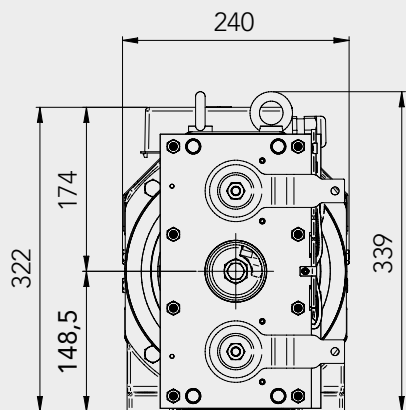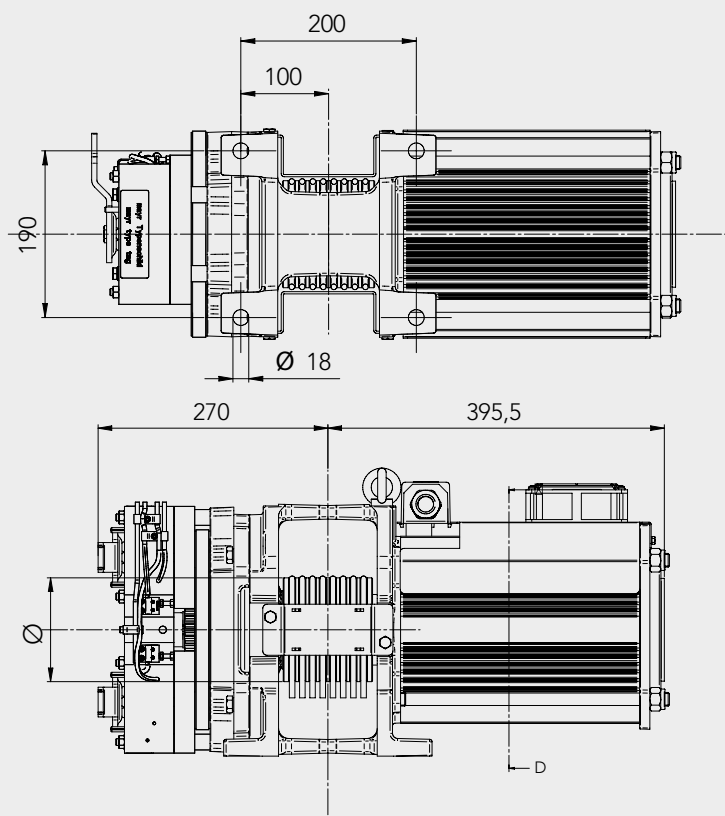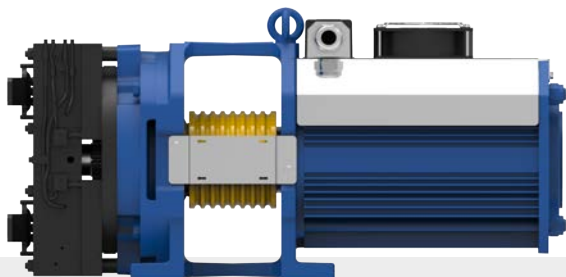

	Portata Load Charge Nutzlast Carga		Ø	Funi Ropes Cables Seilen Cables	Passo Pitch Pas RA Paso	Coppia Torque Couple Drehmoment Par de torsión	Potenza Power Puissances Leistungen Potencia	Giri RPM Tours Drehzahl RPM	Freq.	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinen Máquina	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinen Máquina
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A		A	***
1:1	320	0,5	240	8xØ6,5	12	263	1,1	39,8	6,6	9,9	MGV20200913B501	16,9	MGV20202553B501
		0,63	240	8xØ6,5	12	263	1,4	50,1	8,4	9,9	MGV20200913B501	16,9	MGV20202553B501
		1	240	8xØ6,5	12	263	2,2	79,6	13,3	9,9	MGV20200913B501	23,3	MGV20203823B501
		1,5	240	8xØ6,5	12	263	3,3	119,4	19,9	12,9	MGV20201603B501	23,3	MGV20203823B501
		1,6	240	8xØ6,5	12	263	3,5	127,3	21,2	12,9	MGV20201603B501	23,3	MGV20203823B501
	480	2	240	8xØ6,5	12	263	4,4	159,2	26,5	12,9	MGV20201603B501	23,3	MGV20203823B501
		0,5	160	8xØ6,5	12	249	1,6	59,7	9,9	9,4	MGV20200913B501	16,0	MGV20202553B501
		0,63	160	8xØ6,5	12	249	2,0	75,2	12,5	9,4	MGV20200913B501	22,1	MGV20203823B501
		1	160	8xØ6,5	12	249	3,1	119,4	19,9	12,2	MGV20201603B501	22,1	MGV20203823B501
		1,5	160	8xØ6,5	12	249	4,7	179,0	29,8	16,0	MGV20202553B501	29,2	MGV20205103B501
	675	1,6	160	8xØ6,5	12	249	5,0	191,0	31,8	16,0	MGV20202553B501	29,2	MGV20205103B501
		2	160	8xØ6,5	12	249	6,2	238,7	39,8	16,0	MGV20202553B501	29,2	MGV20205103B501
		0,5	120	8xØ6,5	12	254	2,1	79,6	13,3	9,6	MGV20200913B501	22,6	MGV20203823B501
		0,63	120	8xØ6,5	12	254	2,7	100,3	16,7	12,5	MGV20201603B501	22,6	MGV20203823B501
		1	120	8xØ6,5	12	254	4,2	159,2	26,5	12,5	MGV20201603B501	22,6	MGV20203823B501
		1,5	120	8xØ6,5	12	254	6,4	238,7	39,8	16,3	MGV20202553B501	29,8	MGV20205103B501
		1,6	120	8xØ6,5	12	254	6,8	254,6	42,4	16,3	MGV20202553B501	29,8	MGV20205103B501
		2	120	8xØ6,5	12	254	8,5	318,3	53,1	22,6	MGV20203823B501		

2:1	630	0,5	210	8xØ6,5	12	227	2,2	90,9	15,2	8,6	MGV20200913B501	20,1	MGV20203823B501
			240	8xØ6,5	12	260	2,2	79,6	13,3	9,8	MGV20200913B501	23,0	MGV20203823B501
		0,63	210	8xØ6,5	12	227	2,7	114,6	19,1	11,1	MGV20201603B501	20,1	MGV20203823B501
			240	8xØ6,5	12	260	2,7	100,3	16,7	12,7	MGV20201603B501	23,0	MGV20203823B501
		1	210	8xØ6,5	12	227	4,3	181,9	30,3	14,6	MGV20202553B501	26,6	MGV20205103B501
			240	8xØ6,5	12	260	4,3	159,2	26,5	12,7	MGV20201603B501	23,0	MGV20203823B501
		1,5	210	8xØ6,5	12	227	6,5	272,8	45,5	20,1	MGV20203823B501		
			240	8xØ6,5	12	260	6,5	238,7	39,8	16,7	MGV20202553B501	30,4	MGV20205103B501
		1,6	210	8xØ6,5	12	227	6,9	291,0	48,5	20,1	MGV20203823B501		
			240	8xØ6,5	12	260	6,9	254,6	42,4	16,7	MGV20202553B501	30,4	MGV20205103B501
	1000	2	210	8xØ6,5	12	227	8,7	363,8	60,6	20,1	MGV20203823B501		
			240	8xØ6,5	12	260	8,7	318,3	53,1	23,0	MGV20203823B501		
		0,5	160	8xØ6,5	12	259	3,2	119,4	19,9	12,7	MGV20201603B501	22,9	MGV20203823B501
			160	8xØ6,5	12	259	4,1	150,4	25,1	12,7	MGV20201603B501	22,9	MGV20203823B501
			160	8xØ6,5	12	259	6,5	238,7	39,8	16,6	MGV20202553B501	30,2	MGV20205103B501
			160	8xØ6,5	12	259	9,7	358,1	59,7	22,9	MGV20203823B501		
			160	8xØ6,5	12	259	10,3	382,0	63,7	22,9	MGV20203823B501		
			160	8xØ6,5	12	259	12,9	477,5	79,6	30,2	MGV20205103B501		
		0,63	120	8xØ6,5	12	237	4,0	159,2	26,5	11,6	MGV20201603B501	21,0	MGV20203823B501
			120	8xØ6,5	12	237	5,0	200,5	33,4	15,2	MGV20202553B501	27,7	MGV20205103B501
			120	8xØ6,5	12	237	7,9	318,3	53,1	21,0	MGV20203823B501		
			120	8xØ6,5	12	237	11,9	477,5	79,6	27,7	MGV20205103B501		
			120	8xØ6,5	12	237	12,6	509,3	84,9	27,7	MGV20205103B501		

* Utilizzare funi speciali. Contattare il dipartimento commerciale Montanari per ulteriori informazioni.
 Special ropes must be used. Please contact Montanari Sales department for further indications.

***Disponibile anche 210/1ph - Available also 210/1ph