



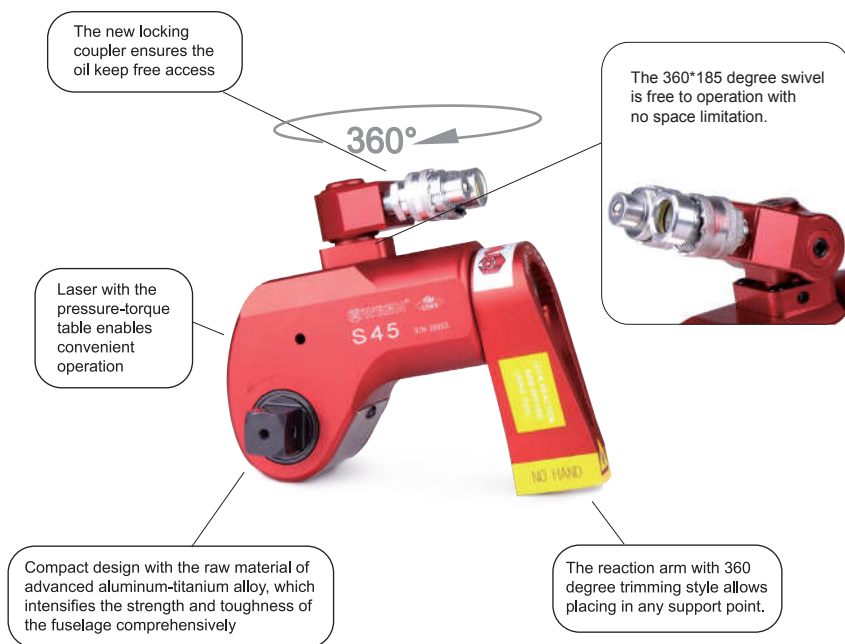

- 700bar maximum working pressure; Repeat accuracy $\pm 3\%$.
- 5 different model from 1727-36992N.m
- 360 degree or 360 X 185 degree swivel coupling.
- Working with the high resistance sockets, above more size of screw
- 360° Adjustable reaction arm with safely lock feature, can be used without reaction arm
- High resistance with aluminum-titanium and light body
- Replaceable square drive adapters

S configured with high technology, ideal for long-term usage by means of aluminum-titanium design. Besides having calibration service and support WREN S is one of the important brands that can accomplish big missions even its small body. Almost every tightening & loosening problems can be accomplished with these series that have a torque capacity up to 3.6992 Nm. WREN serves a wide range accessory for S series. These products which are designed for serving true resolutions, entitled with CE seal result of an effort with appropriate directives.

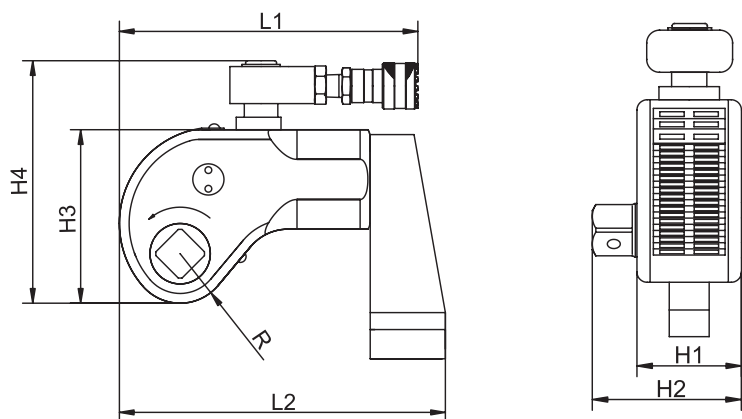

S Series Technical Data

model	Torque (N.m)	Bolt size (M)	Square drive inches	Weight (Kg)	Sizes (mm)						
					L1	L2	H1	H2	H3	H4	R
S17	172~1727	16~36	3/4 "	2	129	167	51	73	90	131	25
S45	452~4529	22~48	1 "	4.6	167	218	68	98	121	170	34
S100	1006~10064	30~64	1 1/2 "	10	223	293	92	135	163	211	46
S150	1497~14974	36~72	1 1/2 "	14.8	264	323	100	141	177	225	50
S370	3699~36992	48~100	2 1/2 "	32.5	329	432	137	104	240	288	66