

Ersatzteile- Katalog

GS 125

Type

520-01LB

ZUNDAPP

ZUNDAPP



CATALOGUE OF SPARE PARTS

GS 125

Enduro, Type 520-01LB, Engine 285-11LM

Color samples: racing-red, INDEX-Number 60


Table of Contents

<u>Engine</u>	<u>Page</u>
Casing right, casing left	2
Casing cover left, kickstarter, gear change shaft	4
Casing cover right, clutch	6
Cylinder, crankshaft	7
Gearbox	8
Flywheel magneto	9
Carburettor, suction socket	10
Exhaust system	12


<u>Frame</u>	
Engine mounting, foot brake	13
Frame, damper, foot rests, centre prop, fuel tank,	14
bench seat, fairings	14
Telescopic fork, handlebar bearing	16
Rear fork, spring unit	18
Front wheel	19
Rear wheel, chain	20
Electrical equipment	22
Electrical equipment	24
Handlebar, operating levers and controls, cables, mirror	26
Wiring Diagramm 125 Enduro	28
Illustration of engine	29
Tin repair varnish, illustration of motorcycle	30

Colour Parts: racing-red, index-no. 60. This number has to be indicated, if spare parts description being marked * (e.g. 520-10.665/60)

Casing right

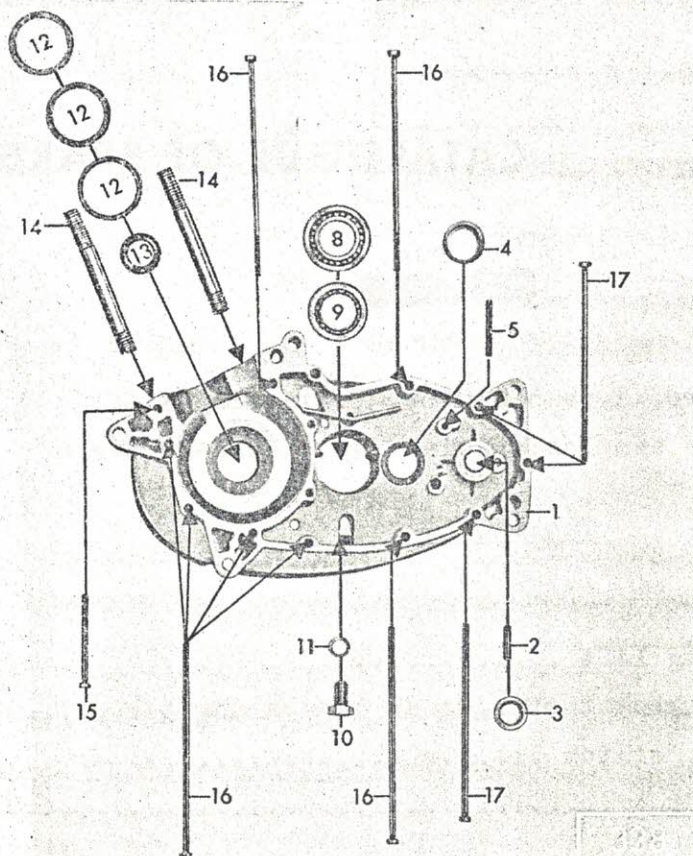


Casing left

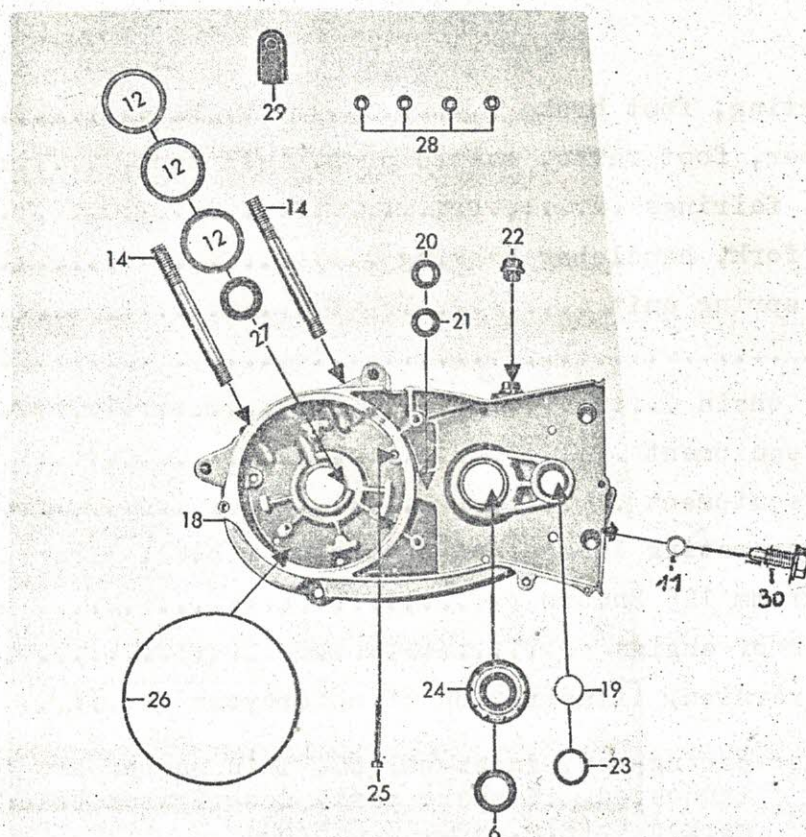

Jll.-No.	Order No.	Description	Piece
1-4	285-01.919	Casing right	1
-	285-01.902	*Housing gasket	1
2	285-01.164	Stud	1
3	267-01.128	Bearing bush 16 ϕ	1
4	281-01.140	Bearing bush 21,5/31 ϕ	1
5	DIN 1481 5x80	Clamping sleeve	1
6	285-01.183	Shaft seal 20x30x7/1 mm	1
8	DIN 625 16005/C3	Ball bearing 25x47x8 mm	1
9	DIN 625 6303/C3	Ball bearing 17x47x14 mm	1
10	DIN 933 M 10x18	Oil drain plug	1
11	DIN 7603 A 10x14	Sealing ring	1
12	285-01.210	Washer 42x51,9x0,05 mm	var.
12	285-01.211	Washer 42x51,9x0,1 mm	var.
12	285-01.212	Washer 42x51,9x0,2 mm	1
13	285-01.220	Shaft seal 20x30x8/1 mm	1
14	285-01.197	Threaded bolt	4
15	DIN 84 BM 6x65x20	Cylinder bolt	1
16	285-01.180	Cylinder bolt M 6x154 mm	8
17	285-01.181	Cylinder bolt M 6x140 mm	3
-	247-01.126	Model plate	1
-	DIN 1476 2x3	Round-head	2
18-22	285-01.920	Casing left	1
19	285-01.203	Bearing bush 20 mm ϕ	1
20	285-01.223	Needle sleeve 12x20x13 mm	1
21	285-01.224	Washer 12,3x19,9x1,0 mm	1
22	281-01.135	Oil filler screw	1
23	285-01.204	Shaft seal 20x28x6 mm	1
24	DIN 625 6204/C3	Ball bearing 20x47x14 mm	1
25	DIN 84 BM 6x45	Cylinder bolt	2
26	285-01.192	Rubber ring 123 mm ϕ x 2,5 mm	1
27	285-01.194	Shaft seal 20x30x7 mm	1
28	M 181 z 138	Press-fit bush	4
29	285-07. 105	Cable sleeve	1
-	285-01.901	*Housing gasket	1
30	285-05.208	Screw SW 17, 35 mm long	1


*when ordering 1 piece, a packet of 5 will be delivered

Casing cover left, kickstarter, gear change shaft

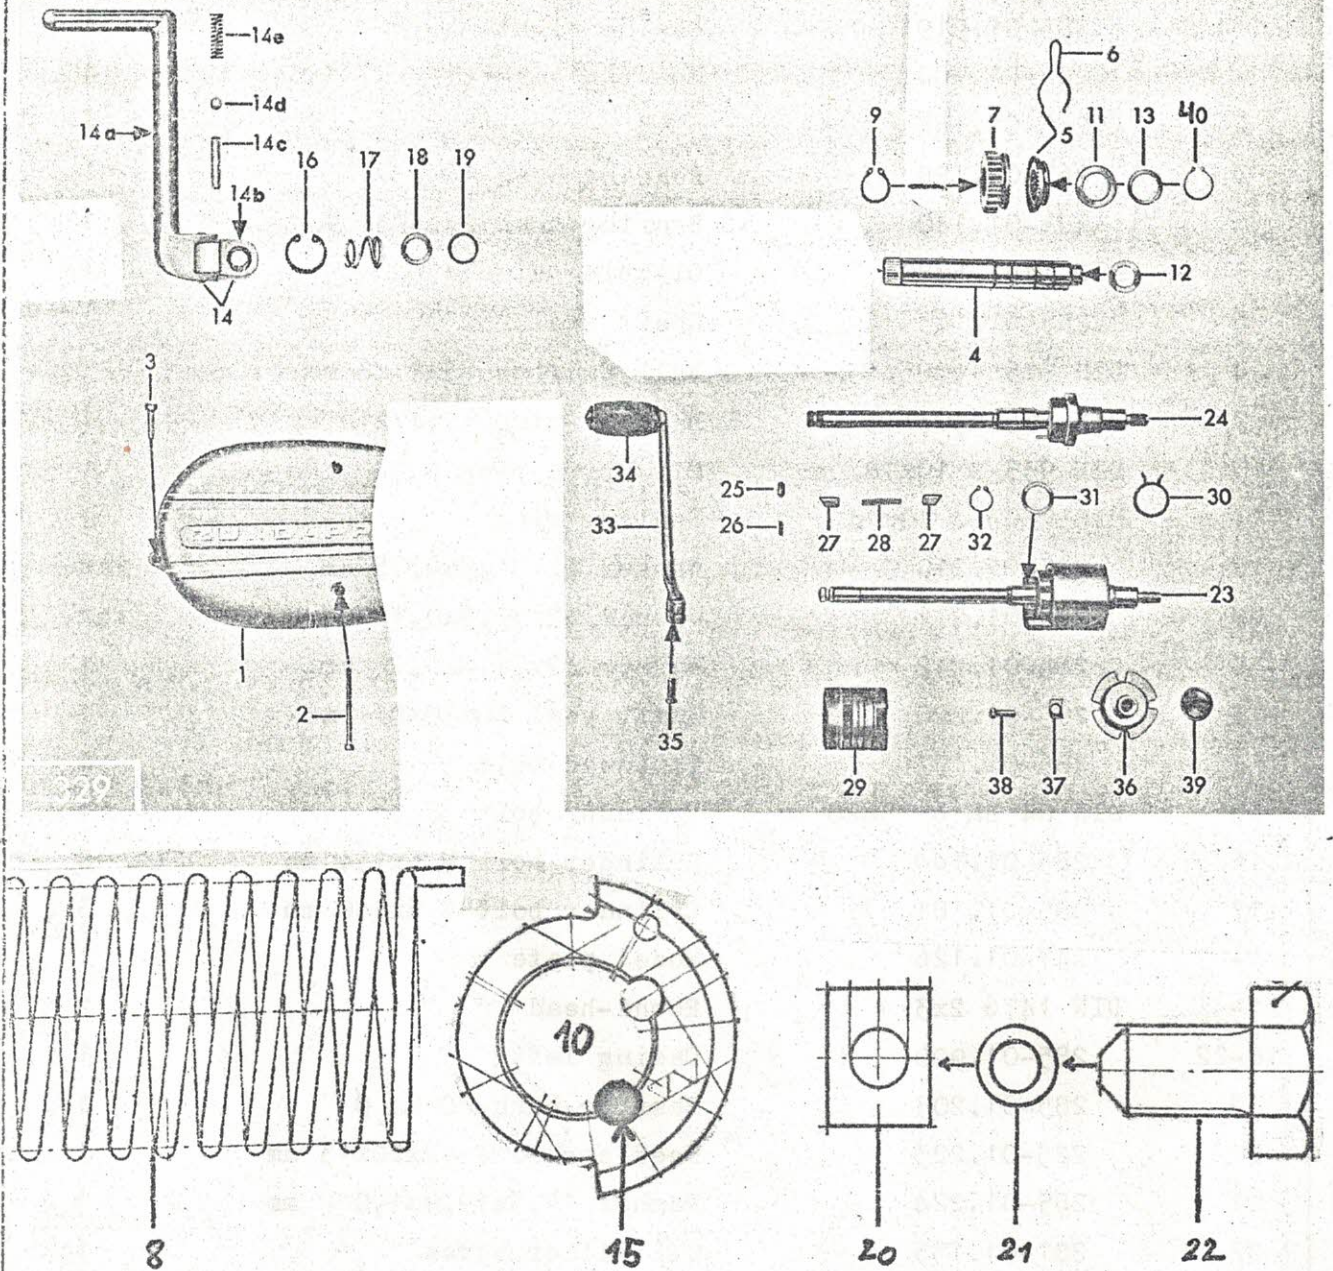


Jll.-No.	Order No.	Description	Piece
1	285-01.177	Casing cover left	1
2	DIN 84 BM 6x55	Cylinder bolt	2
3	DIN 84 BM 6x22	Cylinder bolt	1
4	285-05.235	Kickstarter spindle single	1
5	267-05.910	Dog cpl.	1
6	267-05.334	Brake spring	1
7	285-05.169	Starter gear	1
8	285-05.207	Spring	1
9	DIN 471 20x1,75	Retaining ring	1
10	285-05.209	Starter buffer	1
11	265-05.255	Washer 22,1x32x0,2 mm	var.
11	265-05.257	Washer 22,1x32x0,3 mm	var.
12	265-05.245	Washer 16,2x28x1,0 mm	1
13	267-05.312	Washer 20,2x28x1,0 mm	1
13	267-05.310	Washer 20,2x28x0,1 mm	var.
13	267-05.313	Washer 20,2x28x0,5 mm	var.
13	267-05.315	Washer 20,2x28x0,2 mm	var.
14	285-05.665	Kickstarter lever cpl.	1
14a	285-05.234	Kickstarter lever single	1
14b	285-05.303	Kickstarter sleeve single	1
14c	DIN 7 8x6x36	Cylinder pin	1
14d	DIN 5401 8 Ø	Ball	1
14e	267-05.319	Spring	1
15	DIN 5401 5 Ø	Ball	2
16	DIN 472 22x1	Retaining ring	1
17	285-05.299	Spring	1
18	285-05.300	Washer 12,1x16,5x1,0 mm	1
19	285-05.302	O-Ring 12 mm Ø x 2	1
20	285-05.178	Retaining sheet	1
21	DIN 7603 A 6,5x9,5	Sealing ring	1
22	285-05.211	Screw SW 11	1
23	285-05.701	Gear change shaft cpl.	1
24	285-05.607	Gear change shaft single	1
25	267-05.125	Bolt	1
26	267-05.126	Spring	1
27	267-05.586	Latch	1
28	267-05.585	Spring	1
-	DIN 660 2,6x5	Rivet	1
29	285-05.256	Pawl guide rail	1
30	278-05.100	Return spring	1
31	267-05.244	Washer 16,2x22,8x0,1 mm	var.
32	DIN 471 16x1	Retaining ring	1
33	282-05.700	Foot shift lever cpl.	1
34	616 z 25	Rubber sleeve	1
35	DIN 933 M 6x16	Hexagon screw	1
36	267-05.112	Setting bell	1
37	267-05.113	Shim	2
38	DIN 920 M 6x15	Oval-head screw	2
39	267-05.130	Rubber cap	1
40	DIN 471 20x1,2	Retaining ring	1

Casing cover right, clutch

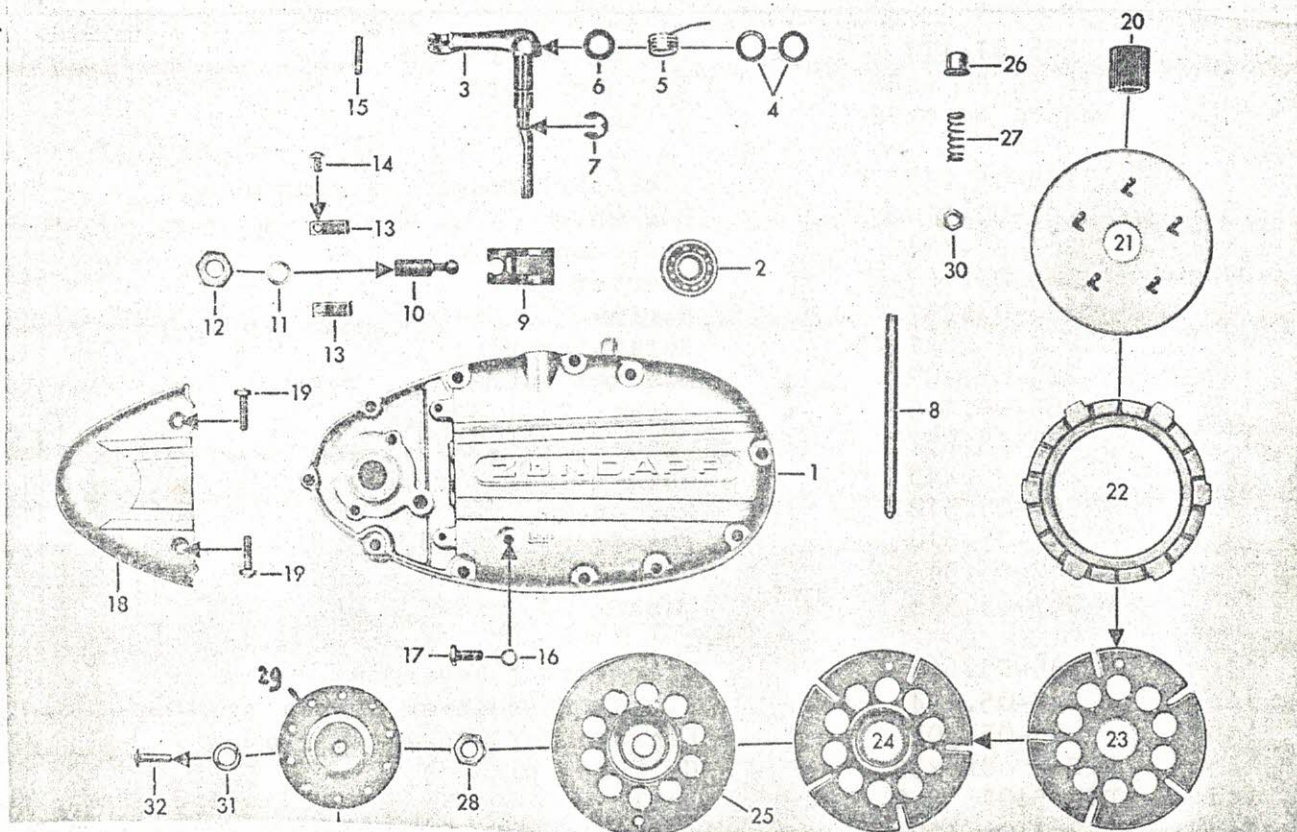


Jll.-No.	Order No.	Description	Piece
1	285-01.113	Casing cover right	1
2	DIN 625 6201/C3	Ball bearing 12x32x10 mm	1
3	265-06.602	Clutch lever	1
4	281-06.114	Washer 0,2 mm thick	1
4	281-06.115	Washer 0,5 mm thick	var.
5	265-06.112	Torsion spring	1
6	405-15.388	Sealing ring	1
7	DIN 6799 8	Retaining washer	1
8	285-05.124	Guide bolt	1
9	265-06.104	Clutch tongue	1
10	265-06.106	Set screw	1
11	DIN 7603 A 10x14	Sealing ring	1
12	DIN 936 M 10x1	Hexagon nut	1
13	265-06.109	Retaining spring	2
14	DIN 84 AM 4x6	Cylinder bolt	2
15	DIN 1481 3x12	Tension bolt	1
16	DIN 7603 A 6x10	Sealing ring	1
17	DIN 85 AM 6x12	Oval-head screw	1
18	285-01.105	Connector cap	1
19	DIN 964 AM 5x20	Oval-head screw	2
20	285-06.101	Pinion	1
21	285-06.600	Retaining plate	1
22	265-06.135	Disk	5
23	265-06.131	Clutch plate	1
24	265-06.130	Clutch plate	3
25	265-06.127	Cover plate	1
26	261-06.155	Spring sleeve	10
27	285-06.107	Clutch spring	10
28	265-06.202	Hexagon nut	1
29	265-06.216	Thrust plate	1
-	284-06.104	Retaining plate	1
30	DIN 934 M 4	Hexagon nut	5
31	265-05.295	Washer 6,1x11,8x0,2 mm	var.
31	265-05.294	Washer 6,1x11,8x0,4 mm	var.
32	247-05.233	Thrust pin	1

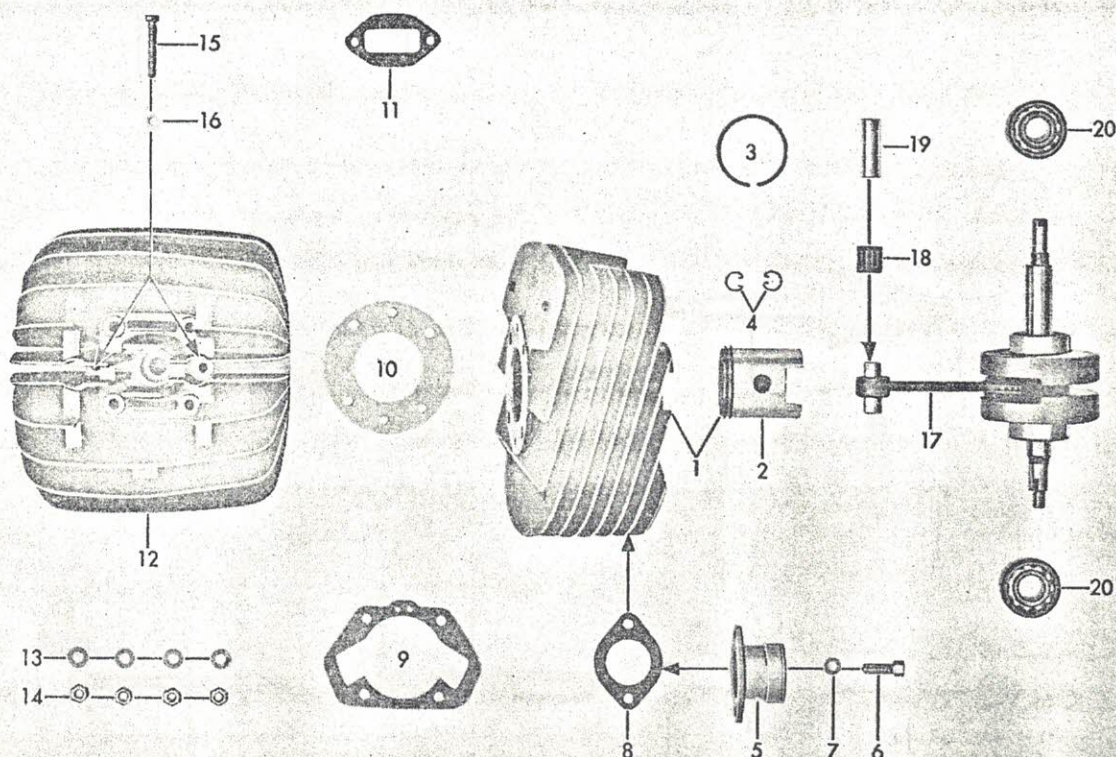

Jl1.-No.	Order No.	Description	Piece
1	285-02.727	Cylinder with piston	1
2	285-02.713	*Piston cpl.	1
3	285-02.137	Piston ring	2
4	DIN 73123 15x1,2	Snap ring	2
5	285-02.632	Flange	1
6	DIN 912 M 8x25	Cylinder bolt	2
7	DIN 433 8,4	Washer	2
8	285-02.162	Gasket	1
9	285-02.152	Cylinder gasket	1
10	285-02.153	Cylinder head gasket	1
11	285-04.108	Gasket for suction socket	1
12	285-02.163	Cylinder head	1
13	DIN 1440 8 Ø	Washer	4
14	DIN 934 M 8	Hexagon nut	4
15	DIN 931 M 7x45	Hexagon bolt	2
16	DIN 125 A 7,4	Washer	2
17	285-03.907	Crankshaft cpl.	1
18	285-03.123	Needle cage 15x19x20 mm	1
19	285-03.120	Piston pin 15 mm Ø	1
20	285-03.905	Ball bearing 20x52x15 mm	2


*Different tolerances!
Indicate tolerance letter being stamped on the cylinder head

Gearbox

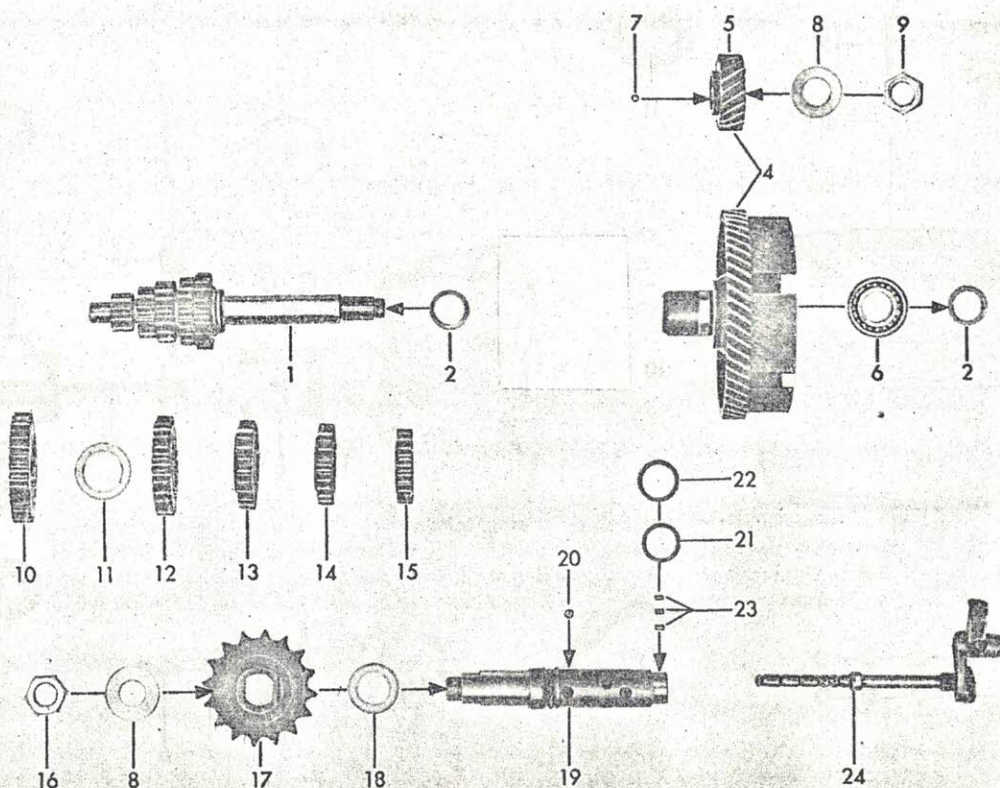


Jll.-No.	Order No.	Description	Piece
1	285-05.637	Drive shaft	1
2	265-05.178	Wascher 17,1x23x0,05 mm	var.
2	265-05.177	Washer 17,1x23x0,1 mm	var.
2	265-05.176	Washer 17,1x23x0,2 mm	var.
2	265-05.175	Washer 17,1x23x0,5 mm	var.
2	265-05.179	Washer 17,1x23x0,8 mm	var.
4	285-05.901	Clutch wheel cpl.	1
5	286-05.102	Pinion single	1
6	DIN 625 6003	Ball bearing 17x35x10 mm	1
7	DIN 5401 5 Ø	Ball	2
8	276-05.198	Washer 15,2x30x0,75 mm	2
9	285-05.151	Nut M 15x1 (lefthand thread)	1
10	285-05.243	Gear wheel f. 1st speed 34 t.	1
11	265-05.256	Washer 22,1x32x0,1 mm	var.
11	265-05.255	Washer 22,1x32x0,2 mm	var.
11	265-05.257	Washer 22,1x32x0,3 mm	var.
12	285-05.242	Gear wheel f. 2nd speed 26 t.	1
13	285-05.241	Gear wheel f. 3rd speed 23 t.	1
14	285-05.239	Gear wheel f. 4th speed 24 t.	1
15	285-05.237	Gear wheel f. 5th speed 19 t.	1
16	276-05.119	Hexagon nut M 15x1 (righthand thread)	1
17	285-05.286	● Chain pinion 12 teeth	var.
17	285-05.199	● Chain pinion 13 teeth	var.
17	285-05.201	● Chain pinion 15 teeth	var.
18	267-05.310	Washer 20,2x28x0,1 mm	var.
18	267-05.315	Washer 20,2x28x0,2 mm	var.
18	267-05.312	Washer 20,2x28x1,0 mm	1
19	285-05.609	Selector shaft single	1
20	278-05.101	Ball 7 mm Ø	20
21	281-05.152	Distance ring 18,1x23,5x1 mm	1
22	281-05.153	Distance ring 19,1x24,9x1 mm	1
23	DIN 5402 3,5x5	Roller	19
24	283-05.608	Pull cotter cpl.	1
17	285-05.200	● Chain pinion 14 teeth	1

Flywheel magneto

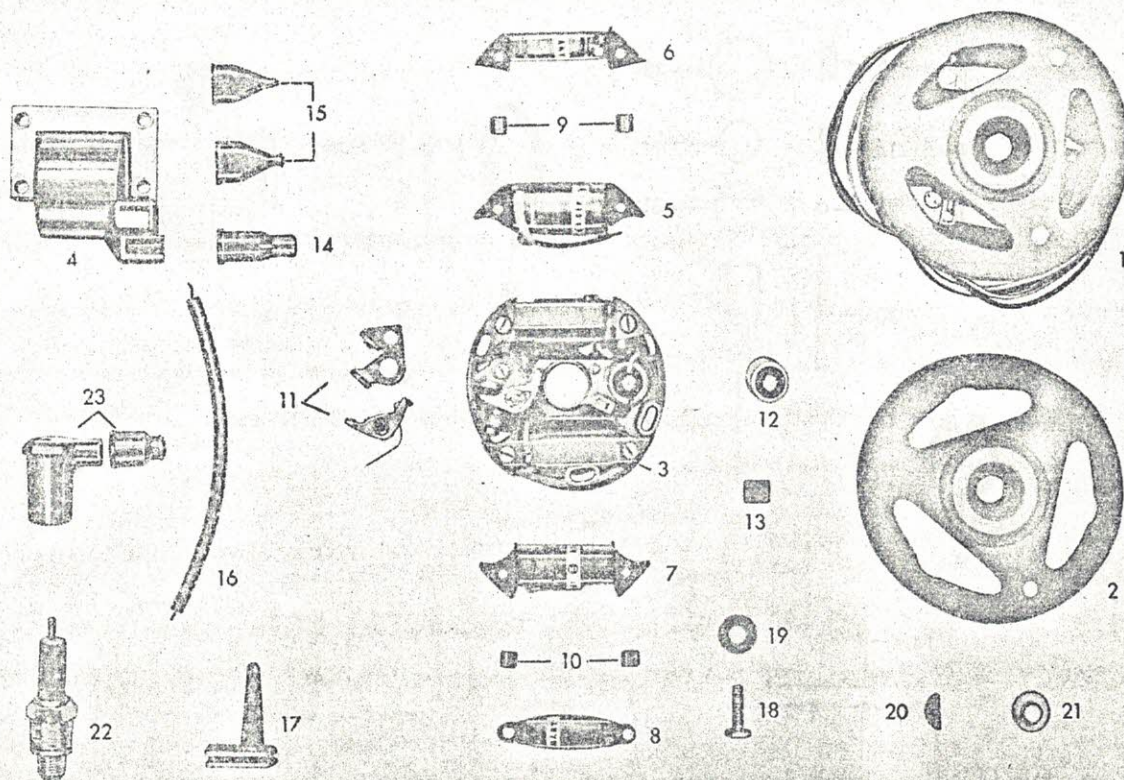


Jll.-No.	Order No.	Description	Piece
1	285-07.714	Ignition magneto cpl. 35-5/18 W	1
2	285-07.901	Flywheel	1
3	285-07.900	Armature plate cpl.	1
4	283-07.702	Ignition coil, secondary	1
5	282-07.903	Ignition coil, primary	1
6	282-07.900	Brake light coil 18 W	1
7	281-07.905	Generator armature 35 W	1
8	282-07.901	Rear light coil 5 W	1
9	283-07.904	Spacer bush	2
10	276-07.909	Spacer bush	2
11	276-07.914	Set of contacts	1
12	277-07.909	Condenser	1
13	265-07.919	Lubricating wick	1
14	282-07.101	Protecting cap	1
15	517-16.108	Protecting cap	2
16	282-07.121	Ignition cable	1
17	283-07.100	Cable grommet	1
18	DIN 84 AM 4x16	Cylinder bolt	2
19	DIN 125 A 4,3	Washer	2
20	DIN 6888 3x3,7	Plate spring	1
21	285-07.115	Nut with collar M 10x1/13 high	1
22	285-07.114	Spark plug W 280 M 1	1
23	265-07.900	Interference-suppressor plug	1

Carburettor, suction socket

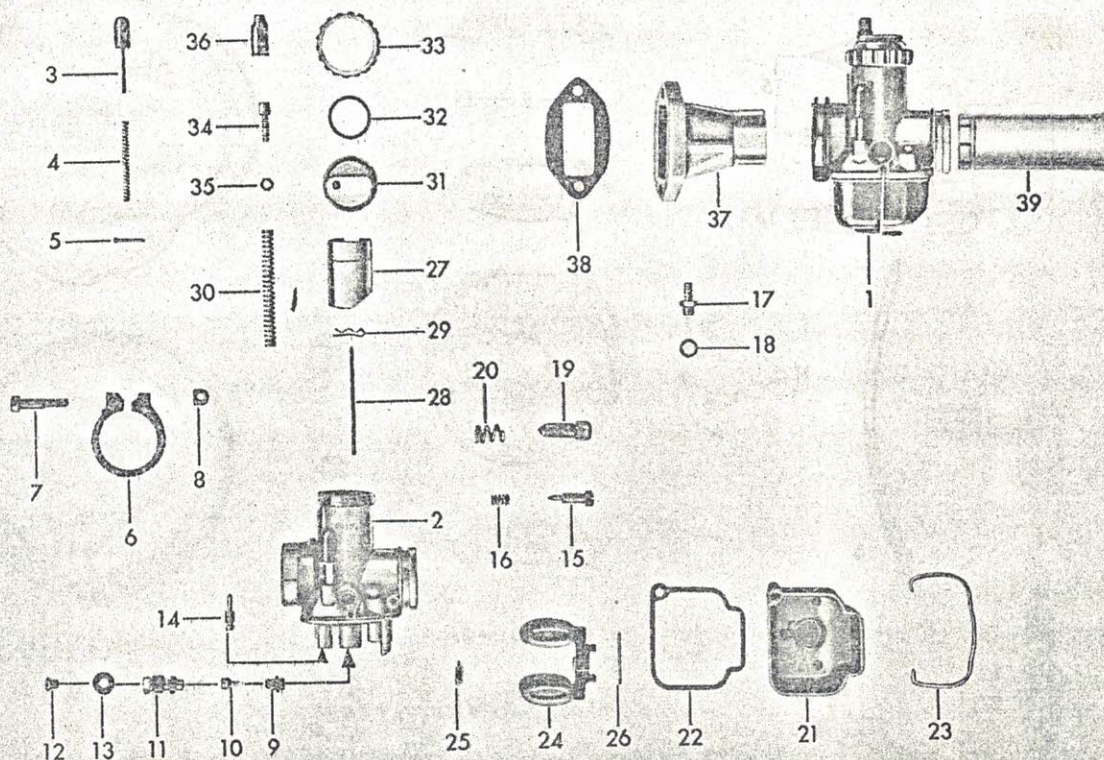


Jll.-No.	Order No.	Description	Piece
1	285-04. 725	Carburettor cpl. 2/26/79	1
2	285-04. 935	Carburettor housing 2/26/79	1
3	285-04.908	Priming button	1
4	276-04.920	Priming button spring	1
5	276-04.916	Split pin	1
6	285-04.909	Clamping ring	1
7	282-04.903	Fixing screw	1
8	285-04.910	Lock nut	1
9	285-04.939	Atomizer	1
10	285-04.937	Needle jet size 2.70	var.
10	285-04.936	Needle jet size 2.73	1
10	285-04.938	Needle jet size 2.76	var.
11	285-04.912	Choke tube	1
12	285-04.948	Main jet size 110	var.
12	285-04.946	Main jet size 112	1
12	285-04.949	Main jet size 115	var.
14	285-04.901	Idle running jet 35	var.
14	285-04.902	Idle running jet 40	1
15	220-04.904	Air regulation screw	1
16	285-04.915	Spring	1
17	267-04.940	Hose grommet	1
18	267-04.946	Sealing ring	1
19	285-04.916	Set screw	1
20	285-04.917	Spring	1
21	285-04.957	Float housing with tube	1
22	285-04.919	Gasket	1
23	285-04.920	Spring	1
24	285-04.921	Float	1
25	285-04.922	Float needle	1
26	285-04.923	Pin	1
27	285-04.958	Gas slide	2
28	285-04.947	Jet needle	1
29	285-04.952	Clamp	1
30	285-04.953	Slided spring	1
31	285-04.942	Cover plate	1
33	285-04.954	Cover screwing	1
34	267-04.938	Adjuster screw	1
35	251-04.927	Nut	1
36	517-17.111	Rubber sleeve	1
37	285-04.184	Suction socket	1
38	285-04.108	Gasket f. suction socket	1
-	DIN 433 6.4	Washer	2
-	DIN 934 M 6	Hexagon nut	2
39	285-04.185	Tube	1
40	285-04.941	Gas slide	1

Exhaust system




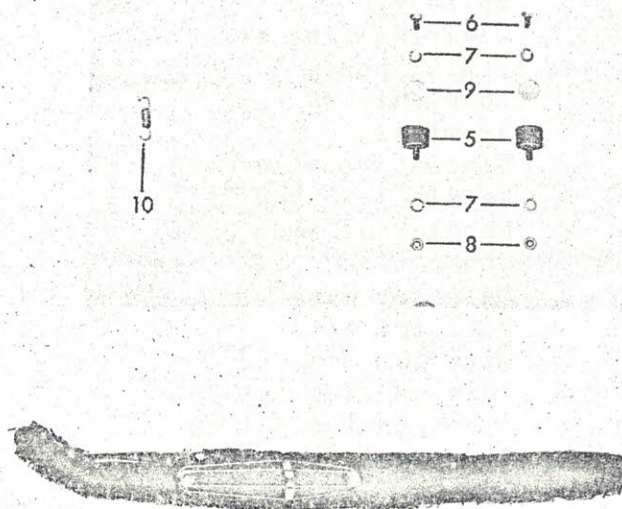


Jll.-No.	Order No.	Description	Piece
1	520-22.714	Exhaust silencer cpl.	1
-	520-22.904	Silencer insert	1
-	DIN 7971 B 4,2x6,5	Screw	1
5	520-10.288	Swing suspension buffer	2
6	DIN 933 M 8x12	Hexagon bolt	2
7	DIN 127 B 8	Spring washer	4
8	DIN 934 M 8	Hexagon nut	2
9	DIN 9021 A 8,4	Washer	2
10	517-15.127	Draw spring	2
--	520-22.114	Asbestos cord 1,5 Ø x 264	1

Engine mounting, foot brake

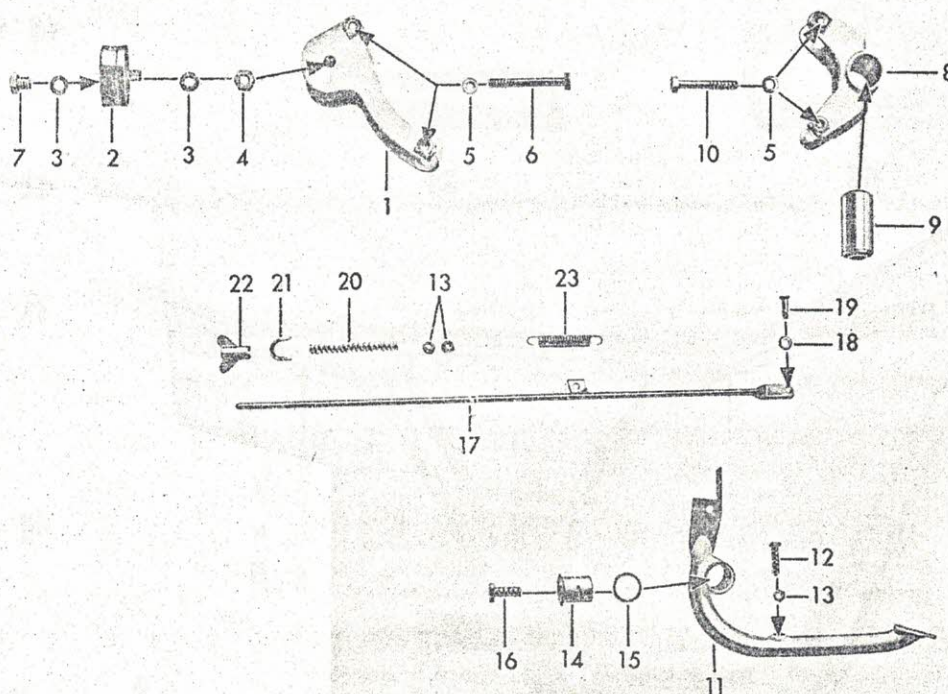


Jll.-No.	Order No.	Description	Piece
1	520-18.615	Engine support	1
2	520-18.613	Rubber-metal buffer	2
3	DIN 127 B 10	Spring washer	4
4	DIN 934 M 10	Hexagon nut	2
5	DIN 127 B 8	Spring washer	5
6	DIN 931 M 8x70	Hexagon screw	2
7	DIN 933 M 10x12	Hexagon screw	2
8+9	520-18.702	Engine mounting rear	1
9	520-14.628	Elastic bush	1
10	DIN 931 M 8x55	Hexagon screw	2
11	520-17.618	Foot brake lever	1
12	DIN 933 M 6x22	Hexagon screw	1
13	DIN 934 M 6	Hexagon nut	3
14	520-17.149	Bearing sleeve	1
15	520-17.141	Ring	2
16	DIN 933 M 8x28	Hexagon screw	1
-	DIN 7346 3x12	Clamping sleeve	1
17	520-17.619	Brake linkage	1
18	DIN 125 A 6,4	Washer	1
-	DIN 94 2x12	Split pin	1
19	519-17.106	Pin	1
20	519-17.110	Spring	1
21	433-17.100	Screen sheet	1
22	428-17.103	Wing nut	1
23	517-17.103	Pull spring	1

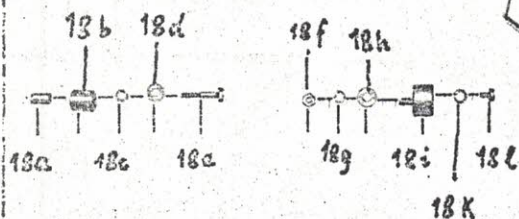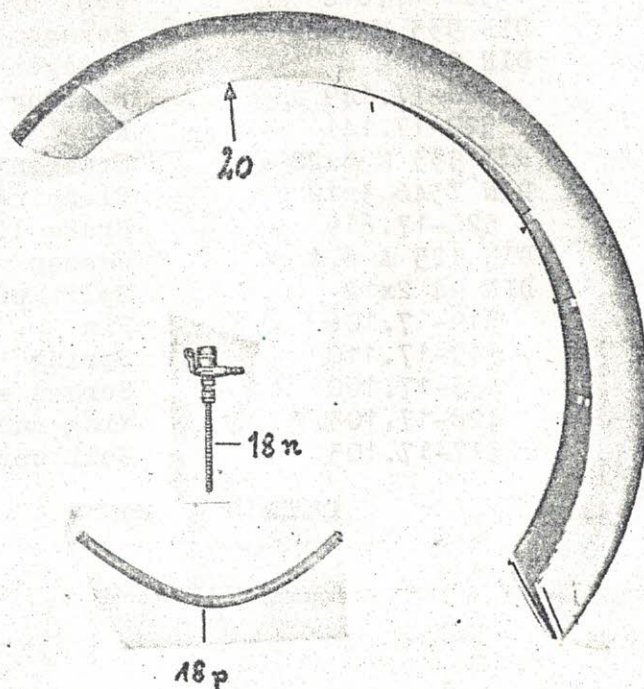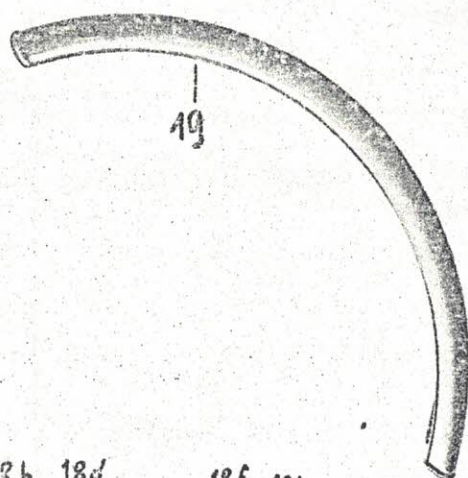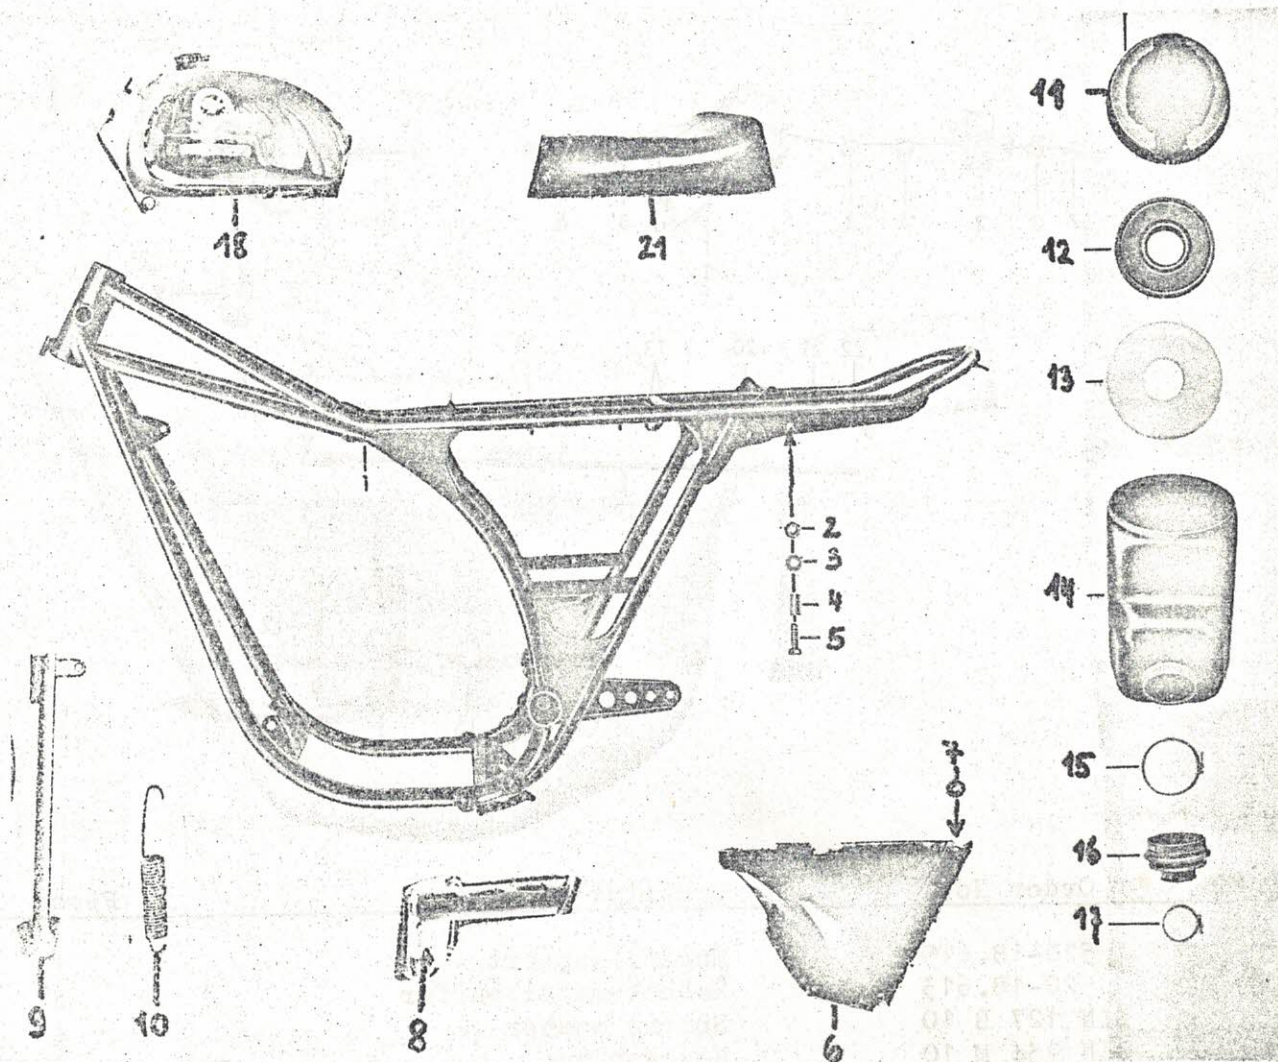

Jll.-No.	Order No.	Description	Piece
1	520-10.665	*Frame	1
2	561-17.111	Retaining nut M 8	2
3	DIN 125 A 8,4	Washer	2
4	520-10.366	Bush 9x14x 8 mm	2
5	DIN 933 M 8x25	Hexagon screw	2
6	520-10.671	Cover for MC 125	1
7	520-10.253	Snap fastener	4
8	520-14.731	Foot rest left cpl.	1
-	520-14.732	Foot rest right cpl.	1
-	DIN 931 M 8x42x22	Hexagon bolt	2
-	561-17.111	Retaining nut M 8	2
-	DIN 127 B 10	Spring washer	2
-	DIN 934 M 10	Hexagon nut	2
9	520-21.620	Prop	1
10	517-21.109	Compression spring	1
--	DIN 931 M 10x40	Hexagon bolt	1
--	519-15.119	Locking nut M 10	1
11	520-10.666	Filter cover	1
--	520-10.373	Gasket for filter cover	1
--	520-10.372	Gasket 34,8 mm $\varnothing$ x 18 mm	1
12	520-10.608	Filter insert	1
13	520-10.363	Filter support	1
14	520-10.370	Noise damper	1
15	520-10.318	Hose clip S 76/9 mm	1
16	520-10.317	Bellow	1
17	520-10.703	Hose clip S 46/9 mm	1
--	435-10.900	Model plate, indecate frame No.	1
--	DIN 1476 2x5	Pin	2
18	520-20.720	*Fuel tank cpl.	1
--	432-20.610	Tank cap	1
--	440-20.100	Plaque, round	2
--	520-20.176	Plaque, ZÜNDAPP	2
18a	520-20.167	Bush 8,2 mm inner dia.	2
18b	520-20.145	Bush 11,5 mm inner dia.	2
18c	DIN 127 B 8	Spring washer	3
18d	422-14.183	Washer	1
18e	DIN 931 M 8x40	Hexagon bolt	2
18f	DIN 934 M 8	Hexagon nut	1
18g	DIN 127 B 8	Spring washer	1
18h	DIN 125 A 8,4	Washer	1
18i	520-10.288	Rubber-metal buffer	1
18k	DIN 127 B 8	Spring washer	1
18L	DIN 933 M 8x10	Hexagon bolt	1
18n	434-20.703	Fuel tap cpl.	1
18p	DIN 73379 Sy.390	Fuel tube A 5x9x290 mm	1
19	520-19.145	Front wheel mud guard	1
--	520-19.631	Mounting bracket, top (for ill-No.19)	1
20	520-19.630	Rear wheel mud guard	1
--	520-19.108	Number plate bracket	1
--	520-19.608	Mounting bracket	1
--	600 z 5	Rubber-metal buffer	3
--	DIN 933 M 6x16	Hexagon bolt	3
--	DIN 933 M 6x18	Hexagon bolt	6
--	517-22.111	Retaining nut M 6	2
21	520-21.623	Bench seat	1
--	520-20.619	Box spanner SW 22	1


*state colour!

Telecopic fork, handlebar bearing

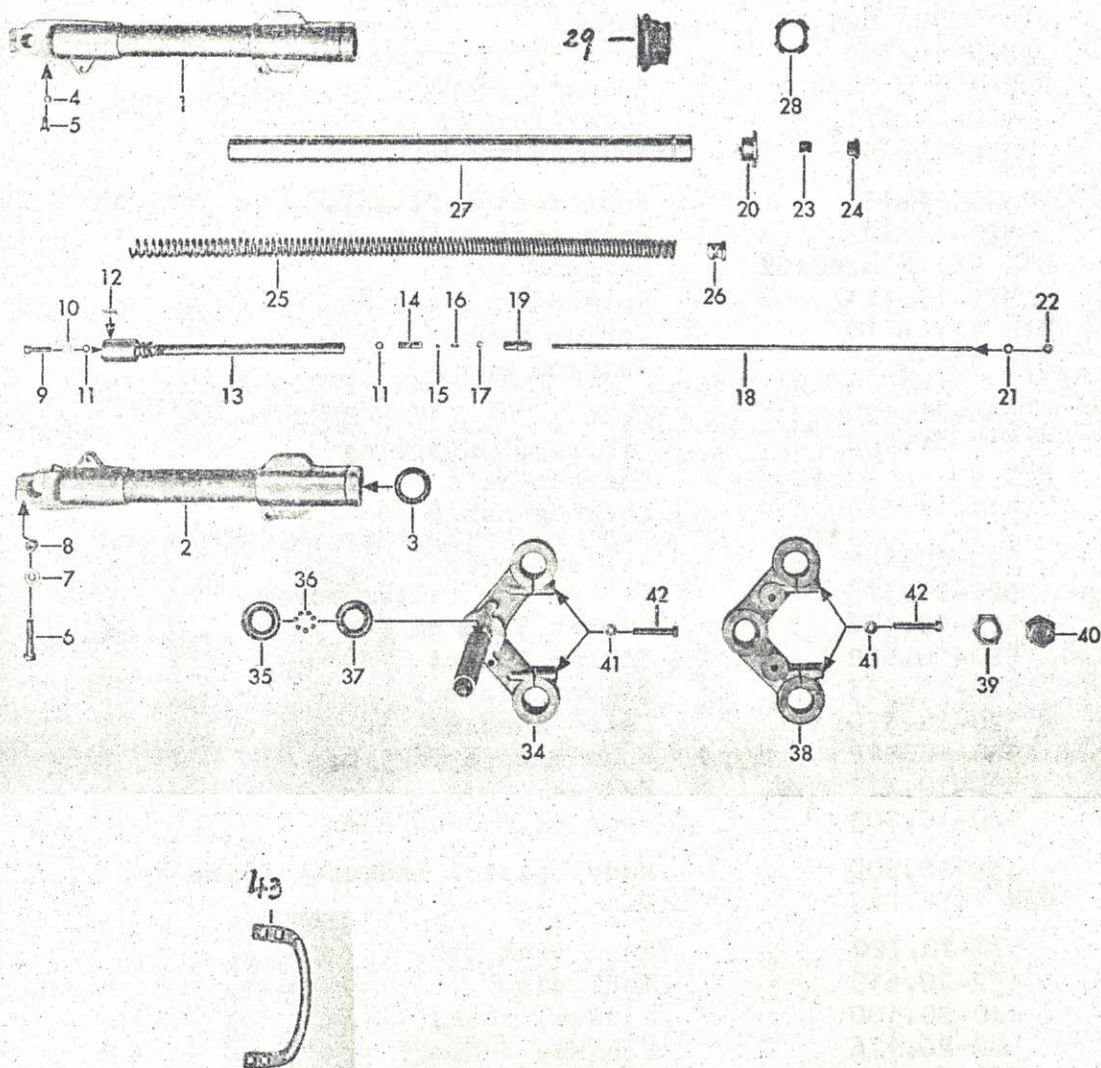

Jll.-No.	Order No.	Description	Piece
1	520-12.720	Fork breaking left, with illustration No. 3, 4, 5	1
2	520-12.721	Fork breaking right, with illustration No. 3, 4, 5	1
3	520-12.226	Shaft seal QH 32x42 G2/51	2
4	DIN 7603 A 6x10	Sealing ring	2
5	DIN 933 M 6x12	Hexagon screw	2
6	DIN 931 M 8x40	Hexagon screw	2
7	DIN 125 A 8,4	Washer	2
8	561-17.111	Locking nut M 8x1	2
9	DIN 912 M 6x25	Cylinder bolt	2
10	DIN 433 6,4	Washer	2
11	520-12.271	O-Ring 6 ϕ x 1,5 mm	4
12	DIN 1481 4x10	Clamping sleeve	2
13	520-12.657	Damper tube	2
14	520-12.265	Piston	2
15	DIN 5401 4,5 ϕ	Ball	2
16	520-12.267	Compression spring	2
17	520-12.266	Hexagon nut	2
18	520-12.264	Threaded bar	2
19	520-12. 274	Guide piece	2
20	520-12. 198	Locking screw	2
21	DIN 127 B 6	Spring washer	2
22	DIN 934 M 6	Hexagon nut	2
23	520-12. 263	Plug	2
24	520-12.199	Locking screw	2
25	520-12. 273	Compression spring	2
26	520-12.272	Spring support	2
27	520-12.656	Fork tube	2
28	520-12.257	Rubber ring	2
29	520-12.235	Collar	2
34	520-12.648	Fork connection bottom	1
35	1871 z 156	Fork bearing race	2
36	DIN 5401 6 ϕ	Ball	36
37	1871 z 155	Frame bearing race	2
38	520-12.204	Fork connection, top	1
39	519-12.110	Cone nut	1
40	520-12.143	Locking nut	1
41	DIN 137 B 7	Spring washer	4
42	DIN 933 M 7x50	Hexagon bolt	4
43	520-19.154	Mounting bracket	1
-	DIN 933 M 6x16	Hexagon bolt	4
-	DIN 125 6,4	Washer	4


Rear fork, spring unit

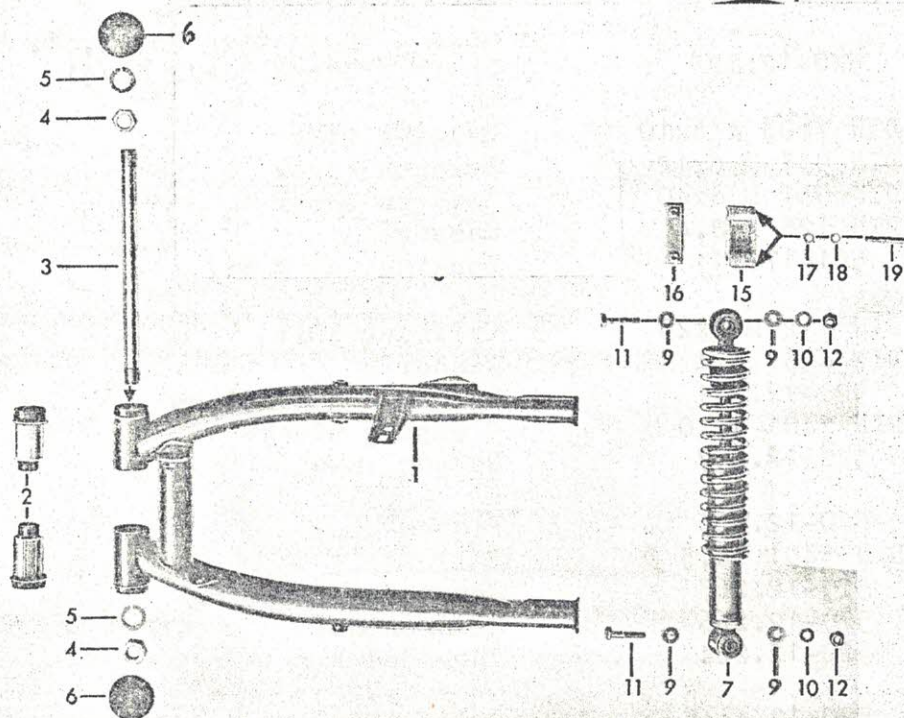

Jll.-No.	Order No.	Description	Piece
1	520-14.728	*Rear fork	1
2	520-14.627	Elastic bush	2
3	520-14.218	Axle	1
4	520-14.217	Nut	2
5	DIN 127 B 16	Spring washer	2
6	520-14.237	Cap	2
7	520-14.706	Spring unit	2
9	DIN 125 A 8,4	Washer	4
10	DIN 137 B 8	Spring washer	4
11	DIN 931 M 8x35	Hexagon bolt	4
12	561-17.111	Retaining nut M 8	5
15	510-18.218	Chain guide	1
16	520-18.617	Plate	1
17	DIN 125 A 6,4	Washer	2
18	DIN 127 B 6	Spring washer	2
19	DIN 931 M 6x45	Hexagon bolt	2


*State colour!

Front wheel




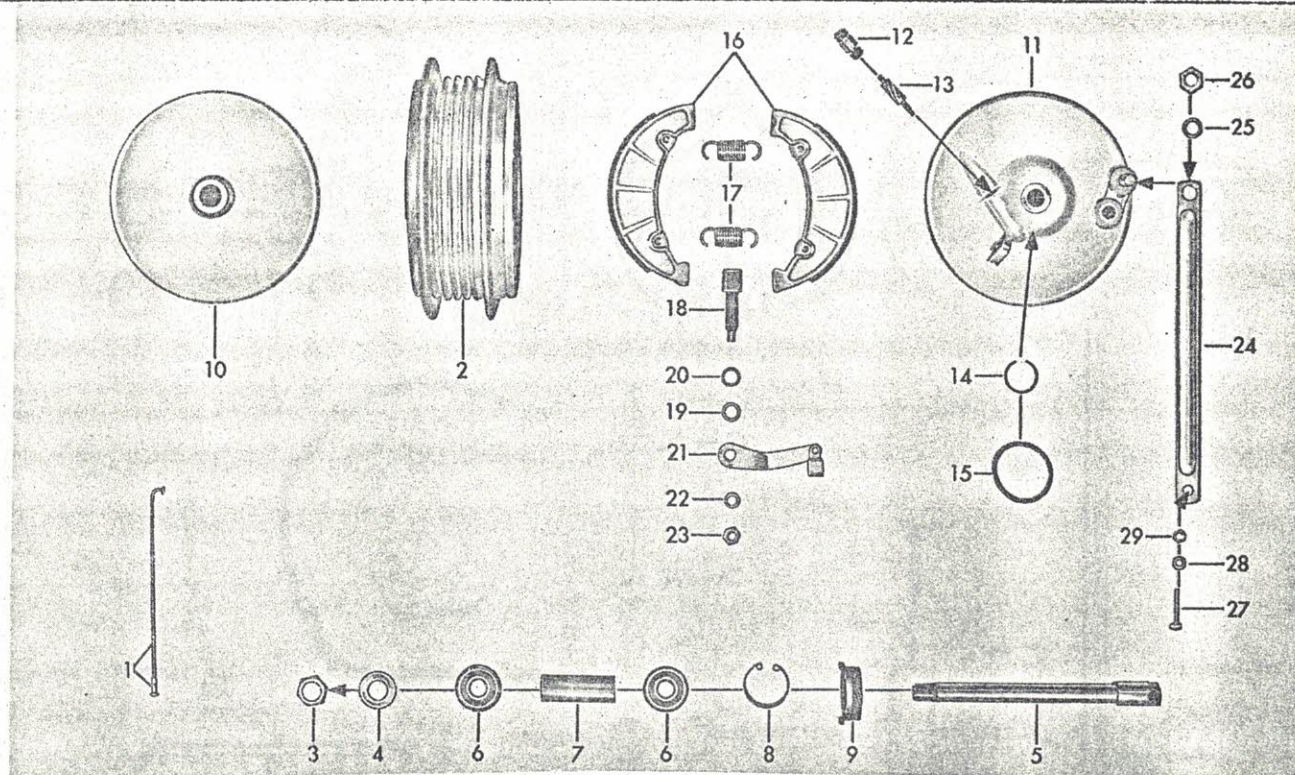


Jll.-No.	Order No.	Description	Piece
-	520-15.201	Rim, 1.6 A - 21	1
-	520-15.189	Stell cord tyre 3.00-21 Gel. D	1
-	520-15.190	Tube D 21	1
-	520-15.191	Tube bandage 18-19"/27	1
1	520-15.203	Inner spoke, length 226 mm 12,5	18
1	520-15.204	Outer spoke, length 226 mm 13,5	18
2	520-15.609	Hub body, single	1
3	DIN 934 M 14x1,5	Hexagon nut	1
4	DIN 125 A 15	Washer	1
5	520-15.179	Knock-out spindle	1
6	DIN 625 6202 z/C3	Ball bearing 15x35x11 mm	2
7	520-15.193	Spacer tube	1
8	DIN 472 35x1,5	Retaining ring	1
9	520-15.900	Dog cpl.	1
10	520-15.611	Hub cover single	1
11	520-15.645	Brake plaste	1
12	515-15.100	Threaded socket	1
13	520-15.196	Speedometer pinion	1
14	DIN 9045 25	Circlip	1
15	520-15.195	Felt ring	1
16	520-15.609	Brake shoe (1 pair)	1
17	517-15.133	Draw spring	2
18	561-15.620	Brake spindle	1
19	267-05.597	Washer	1
20	405-15.388	Sealing ring	1
21	517-15.607	Brake lever	1
22	DIN 127 B 8	Spring washer	1
23	DIN 936 M 8x1	Hexagon nut	1
24	520-15.177	Strip	1
25	DIN 127 B 10	Spring washer	1
26	DIN 934 M 10	Hexagon nut	1
27	DIN 933 M 6x30	Hexagon bolt	1
28	DIN 125 A 6,4	Washer	1
29	517-22.111	Retaining nut M 6	1

Rear wheel, chain

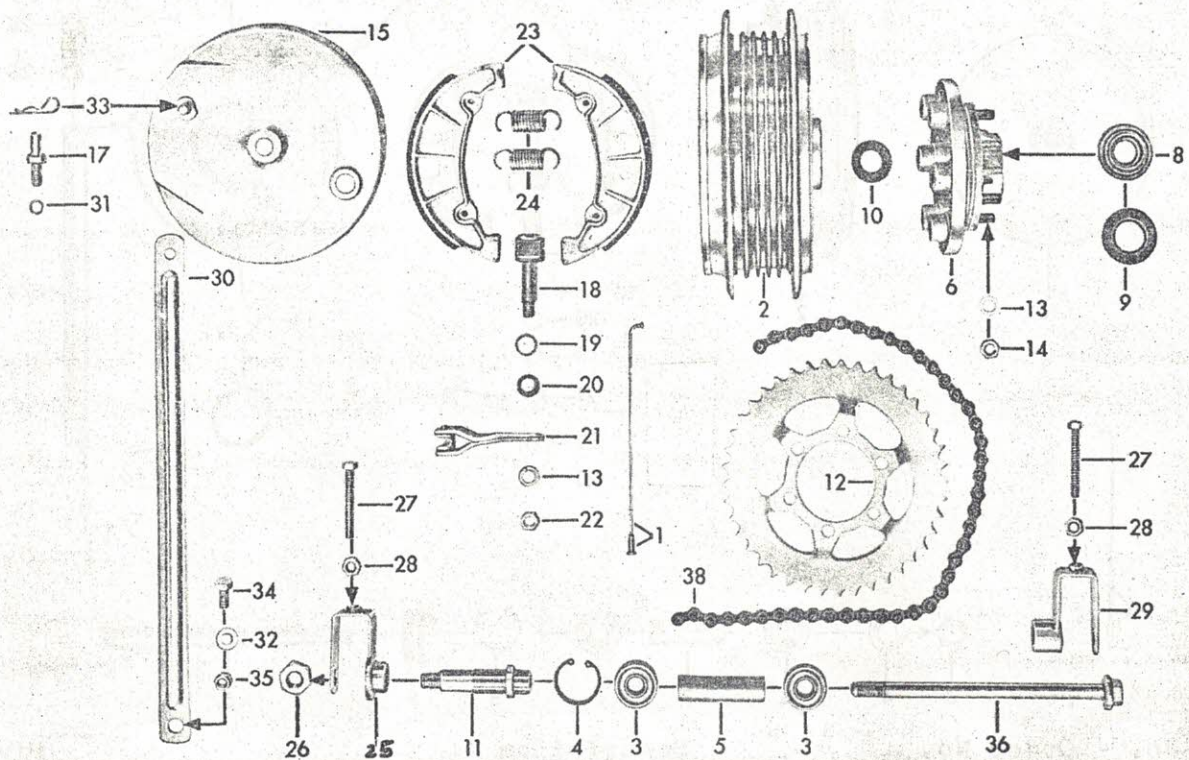

Jll.-No.	Order No.	Description	Piece
-	519-15.123	Rim 1285 B = 18	1
-	519-15.126	Steel cord tyre 3.50-18 Gelände D	1
-	519-15.139	Tube E 18	1
-	520-15.186	Tube bandage 18-19"/27	1
1	520-15.207	Inner spoke 159 length, 12,5	18
1	520-15.208	Outer spoke 159 length, 13,5	18
2	520-15.609	Hub body	1
3	DIN 625 6202 Z/C3	Ball bearing 15x35x11 mm	2
4	DIN 472 35x1,5	Retaining ring	1
5	520-15.193	Spacer tube	1
6	520-15.902	Hub flange with 6 Hexagon bolt	1
7	DIN 933 M 8x25	Hexagon bolt	6
8	DIN 2 5 6004 Z	Ball bearing 20x42x12 mm	2
9	520-15.216	Shaft seal 25x42x6/1 mm	1
10	517-15.112	Bush	6
11	520-15.209	Retaining bush	1
12	520-15.187	Chain sprocket 60 teeth	1
13	DIN 127 B 8	Spring washer	7
14	DIN 934 M 8	Hexagon nut	6
15	520-15.644	Brake plate	1
17	520-15.214	Bearing pin	1
18	520-15.608	Brake spindle	1
19	267-05.597	Washer	1
20	405-15.388	Sealing ring	1
21	520-15.632	Brake lever	1
22	DIN 936 M 8x1	Hexagon nut	1
23	517-15.609	Brake shoe (1 pair)	1
24	517-15.133	Draw spring	2
25	520-15.613	Chain tensioner left	1
26	433-15.131	Nut	1
27	DIN 933 M 7x50	Hexagon bolt	2
28	DIN 934 M 7	Hexagon nut	2
29	520-15.614	Chain tensioner right	1
30	520-15.650	Strip	1
31	520-15.169	Bush	1
32	DIN 125 A 8,4	Washer	1
33	520-15.150	Spring clip	1
34	DIN 933 M 8x22	Hexagon bolt	1
35	561-17.111	Retaining nut M 8x1	1
36	520-15.206	Knock-out spindle 15 ø	1
38	519-18.607	Chain with lock, 1/2"x5/16", 114 links	1










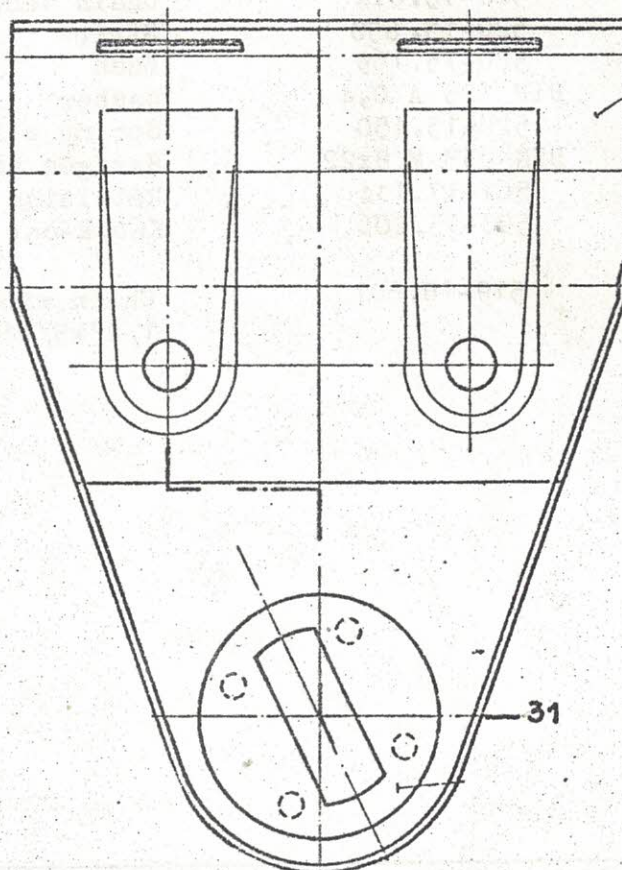
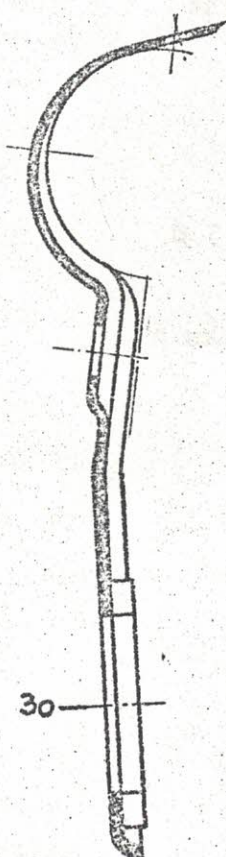
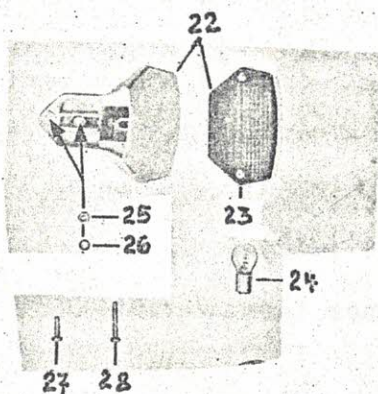
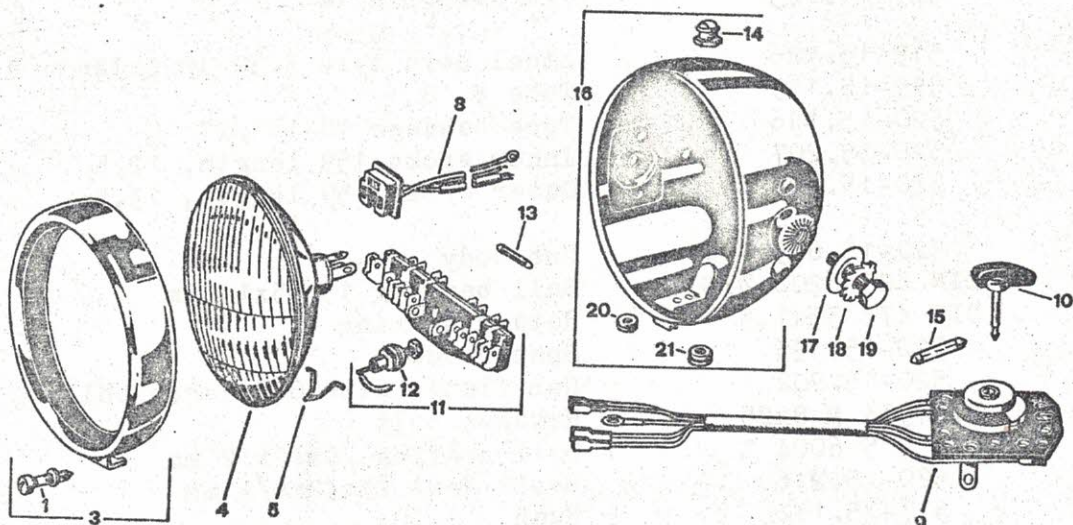


J11.-No.	Order No.	Description	Piece
-	520-16.750	*Headlamp cpl., 30/30 W	1
1	519-16.901	Screw cpl.	1
3	519-16.900	Lens retaining ring cpl.	1
4	519-16.902	Headlamp front part	1
5	519-16.903	Spring (available in pieces)	9
8	520-16.922	Three-pole plug w/cable	1
9	520-16.923	Ignition switch cpl. with cable	1
10	520-16.924	Ignition key	1
11	520-16.925	Terminal board with rectifier	1
12	520-16.926	Rectifier single	1
13	520-16.927	Fuse 15 Amp.	1
15	520-16.928	Bulb 6 V, 1,5 W, for control light	1
16	520-16.929	*Headlamp casing cpl.	1
17	519-16.908	Washer	2
19	519-16.909	Fixing plug	2
20	519-16.910	Sleeve left, 10x20 mm	1
21	520-16.930	Sleeve right, 12x21 mm	1
22	520-16.701	Rearlight cpl., red, without bulb	1
23	520-16.900	Light outlet cpl.	1
24	DIN 72601 SL6V, 21-5W	Bulb	1
25	DIN 934 M 6	Hexagon nut	2
26	DIN 127 B 6	Spring washer	2
27	DIN 85 M 6x16	Lens head screw	1
28	DIN 84 AM 6x35	Cylinder bolt	1
29	520-16.766	Horn	1
--	DIN 933 M 6x10	Hexagon bolt	1
--	DIN 127 B 6	Spring washer	1
30	520-16.655	Clamping	2
--	DIN 933 M 6x16	Hexagon bolt	4
--	DIN 125 A 6,4	Washer	4
31	520-16.656	*Headlamp holder right	1
--	520-16.657	*Headlamp holder left	1
--	DIN 933 M 8x18	Hexagon bolt	2
--	DIN 127 B 8	Spring washer	2
--	DIN 9021 A 8,4	Washer	2

*State colour!
















J11.-No. 32 - 57

see page 25

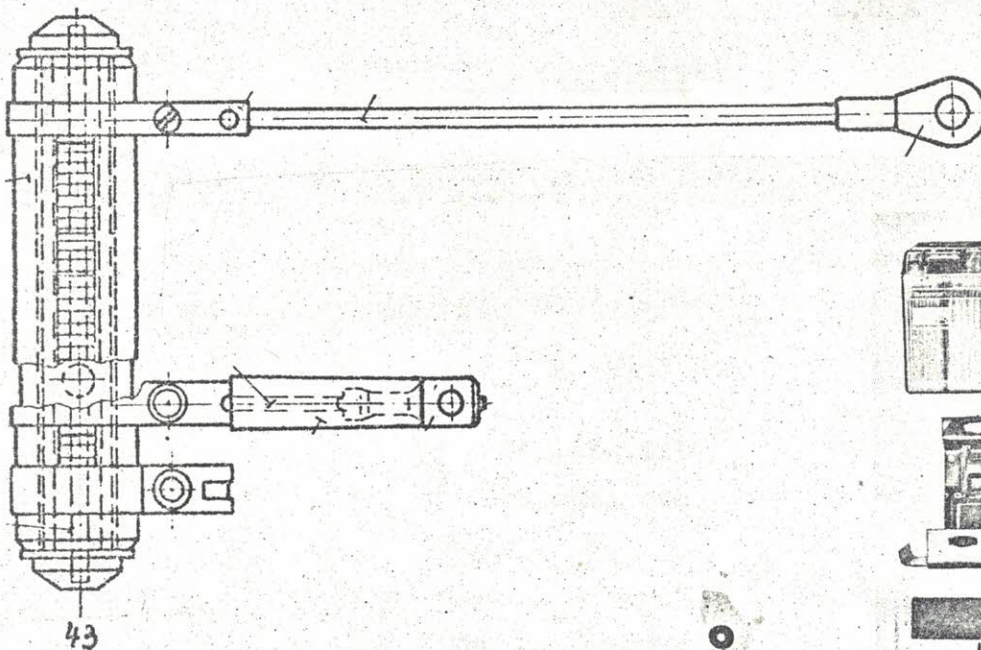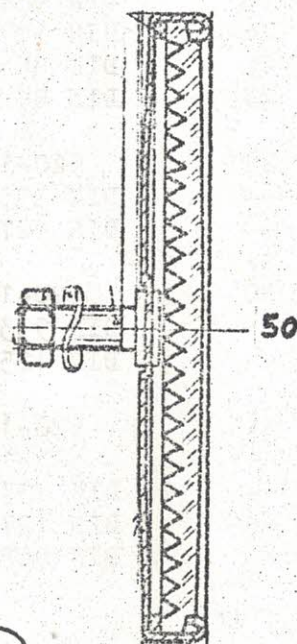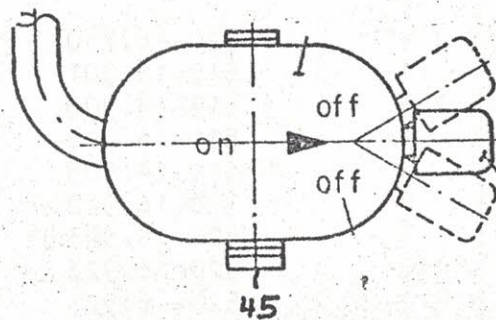


J11.-No.	Order No.	Description	Piece
32	304-07.260	Plug housing	1
33	520-16.255	Round plug	5
34	520-16.256	Round plug sleeve	1
35	304-07.276	Insulating sleeve	11
36	DIN 46247 6,3x1	Plug sleeve	9
36	304-07.249	Plug sleeve, 19,1 mm length 0,3 thick	3
36	304-07.251	Plug sleeve, 19,4 mm length 0,4 thick	1
37	686-16.129	Connecting piece	1
38	304-16.204	Flat plug contact	2
39	6160 z 237	Cable coupler with fuse	1
40	DIN 72581 8	Fusé	2
41	520-16.607	Speedometer flexible shaft	1
42	520-16.713	Speedometer with bow	1
--	265-02.120	Washer	1
--	432-10.210	Rubber sleeve	2
43	520-16.751	Resistance cpl.	1
--	DIN 84 AM 4x10	Cylinder bolt	1
--	DIN 6797 A 4,3	Washer	1
44	520-16.753	Dipping switch cpl.	1
45	520-16.767	Short cut switch cpl.	1
46	518-16.130	Rectifier	1
47	520-16.725	Stop light switch cpl.	1
48	520-16.901	Protecting cap	1
--	DIN 84 AM 12	Cylinder bolt	2
--	DIN 125 A 4,3	Washer	var.
49	520-16.257	Protecting cap	2
50	520-16.646	Rear tail-light, red	3
--	520-16.647	Rear tail-light, yellow	2
51	520-16.728	Stop light switch	1
--	520-16.243	Sleeve, for stop lighth switch	1
52	6060 z 107	Battery	1
53	520-16.608	Battery holder	1
54	520-16.610	Rubber band	1
55	520-16.117	Rubber plate, 40x140x4 mm	1
56	514-10.118	Distance rubber	3
57	M 1806 z 59	Rubber sleeve	1
--	DIN 933 M 6x12	Hexagon bolt	2
--	DIN 127 B 6	Spring washer	2

Handlebar, operating levers and controls, cables, mirror

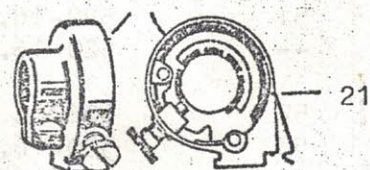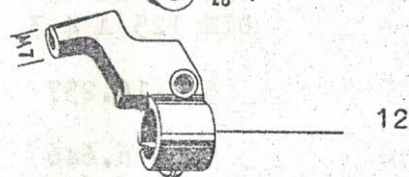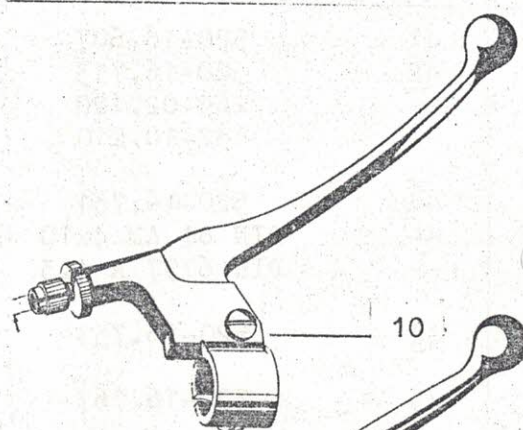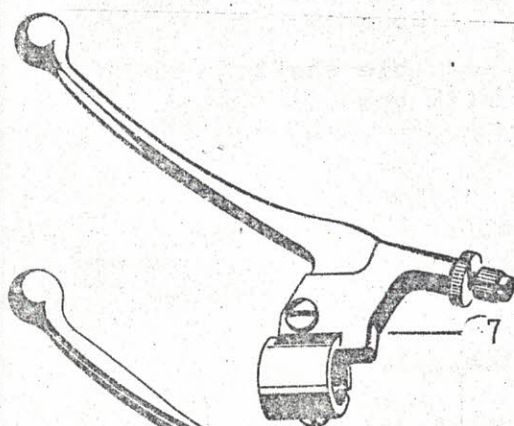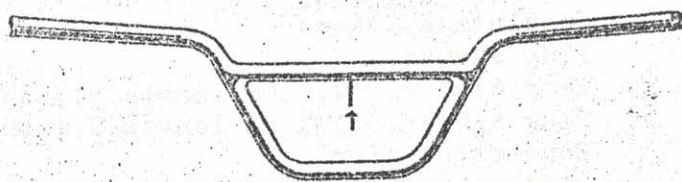

Jl1.-No.	Order No.	Description	Piece
1	520-13.616	Sports handlebar	1
2	DIN 933 M 7x40	Hexagon bolt	1
-	DIN 933 M 7x35	Hexagon bolt	3
3	DIN 125 A 7,4	Washer	4
4	520-13.146	Mounting bracket, top	1
5	520-13.147	Mounting bracket, bottom	1
-	DIN 912 M 8x40	Cylinder bolt	2
-	DIN 125 A 8,4	Washer	2
6	561-17.111	Locking nut M 8	2
7	516-17.704	Clutch lever cpl.	1
8	510-17.908	Hand lever, left	1
9	425-17.910	Joint cpl.	1
--	520-17.177	Protecting cap (without hole)	1
10	520-17.706	Brake lever cpl.	1
11	516-17.907	Hand lever, right	1
12	520-17.924	Joint cpl.	1
13	425-17.718	Adjuster screw M 7	2
14	425-17.902	Lever screw	2
15	DIN 6797 J 6,4	Washer	2
16	DIN 934 M 6	Hexagon nut	2
17	400-17.912	Lens head screw	2
18	516-17.705	Fixed grip	1
--	520-17.718	Throttle twist grip cpl.	1
19	520-17.919	Grip tube cpl.	1
20	520-17.920	Grip cover	1
21	520-17.921	Housing cpl.	1
22	400-17.912	Lens head screw	1
23	520-17.922	Knurled screw, with spring	1
24	520-17.923	Protecting cap	1
--	520-17.176	Protecting cap (with hole for Brake lever, right)	1
25	520-17.717	Starter lever cpl.	1
26	520-17.630	Clutch cable cpl.	1
27	515-17.715	Adjuster screw	1
28	520-17.620	Brake cable cpl.	1
29	428-17.715	Adjuster screw	1
30	520-17.633	Throttle cable cpl.	1
--	520-17.632	Starter cable cpl.	1
--	428-17.635	Plastic oiler	4
--	512-21.701	Mirror cpl.	1
--	512-21.100	Clamping piece	1
--	DIN 137 B 8	Spring washer	1
--	DIN 934 M 8	Hexagon nut	2

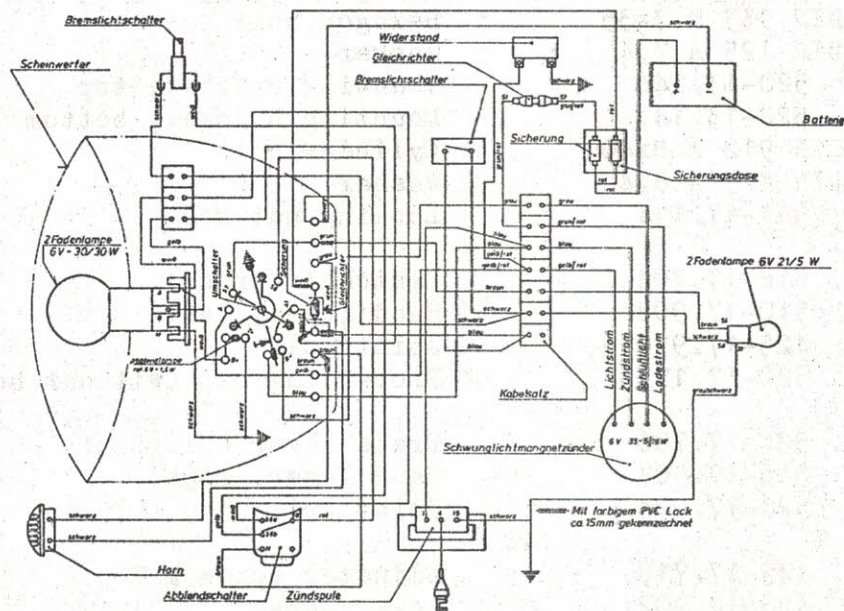

Explanations to wiring-diagram 125 Enduro


Scheinwerfer	=	headlamp
2-Fadenlampe 6 V, 30/30 W	=	two-filament bulb
2-Fadenlampe 6 V, 21/5 W	=	two-filament bulb
Abblendlampe rot, 6 V, 1,5 W	=	dimming-bulb, red
Horn	=	horn
Abblendschalter	=	dimming-switch
Umschalter	=	change-over switch
Sicherung	=	fuse
Gleichrichter	=	rectifier
Bremslichtschalter	=	brake light switch
Widerstand	=	resistance
Zündspule	=	ignition coil
Kabelsatz	=	set of cables
Batterie	=	battery
Sicherungsdose	=	fuse box
Lichtstrom	=	light current
Zündstrom	=	ignition current
Schlußlicht	=	rear light
Ladestrom	=	charging current
Schwungradmagnetzünd	=	flywheel magneto 6 V, 35-5/18 W
Mit farbigem PVC-Lack ca. 15 mm gekennzeichnet	=	marked by coloured varnish PVC ca. 15 mm

schwarz = black
 weiß = white
 gelb = yellow
 blau = blue
 braun = brown
 violett = violet

rot = red
 grün = green
 grau = gray
 gelb-rot = yellow-red
 grün-rot = green-red
 grau-schwarz = gray-black

ZUNDAPP

Typen 285

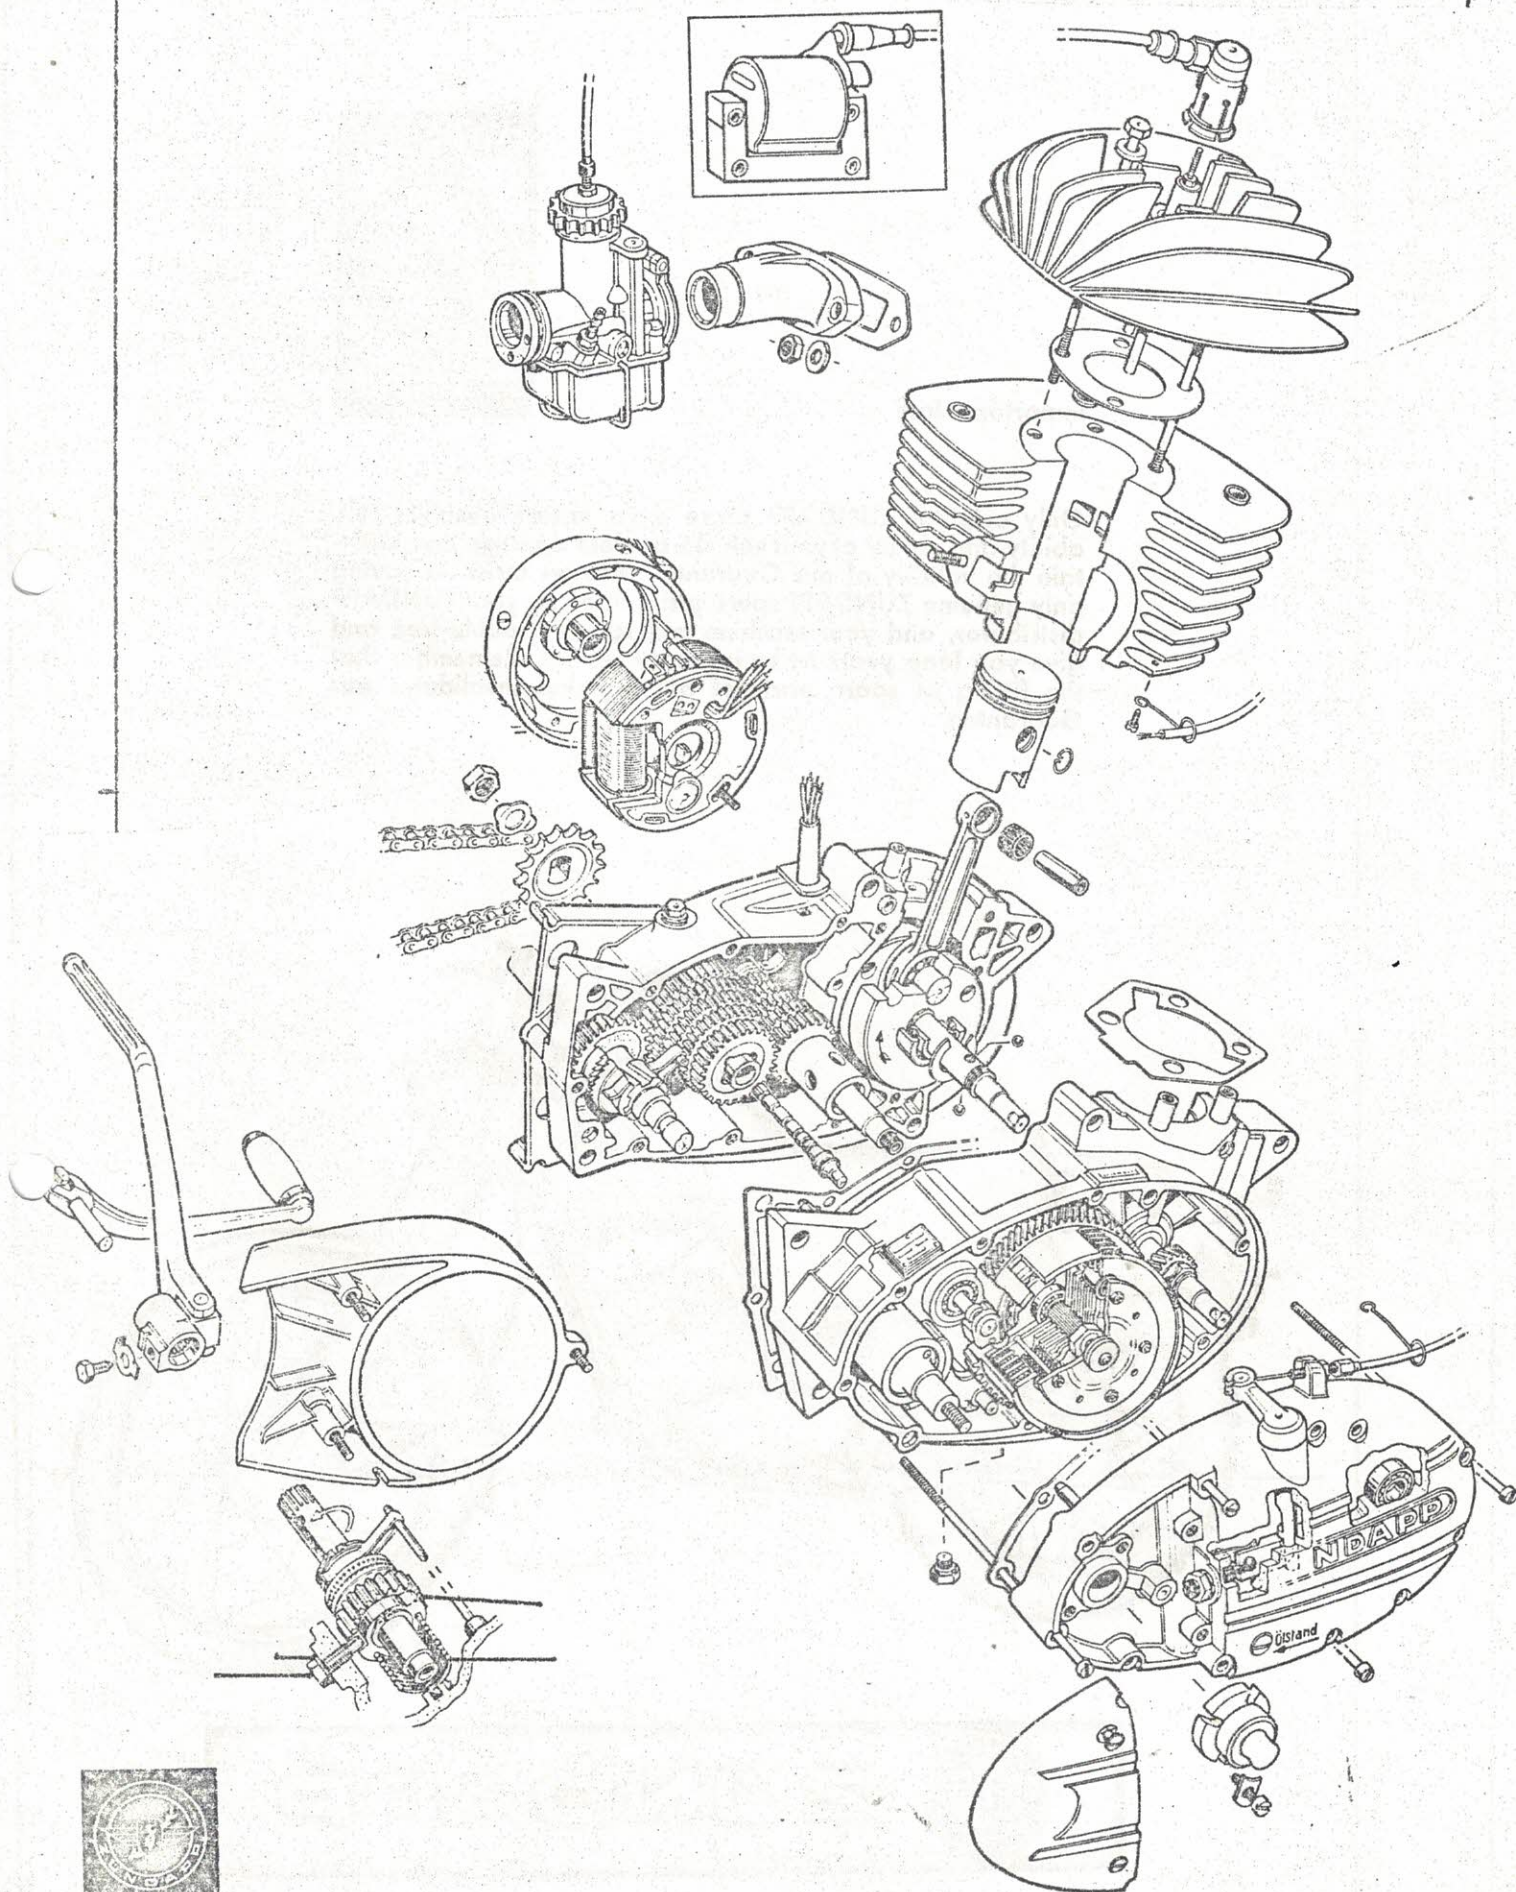

Color samples	racing-red	005-02.060
Fairings	racing-silver	005-02.038



Important Note

Only original ZUNDAPP spare parts ensure absolute reliability and safety of your vehicle, prevent damage and maintain the validity of our Guarantee. Always insist on having only genuine ZUNDAPP spare parts fitted by your ZUNDAPP distributor, and your machine will remain trouble-free and give you long years of satisfactory service. Remember that the fitting of spare parts of other makes invalidates our Guarantee.

