



**OME 63 M, oil mist separator for
pumping speeds up to 135 m³/h**




Similar Image

OME 63 M, oil mist separator for pumping speeds up to 135 m³/h

- For exhaust flange
- Prevents emission of oil mist
- Customer benefit: Clean, oil free exhaust air

Dimensions

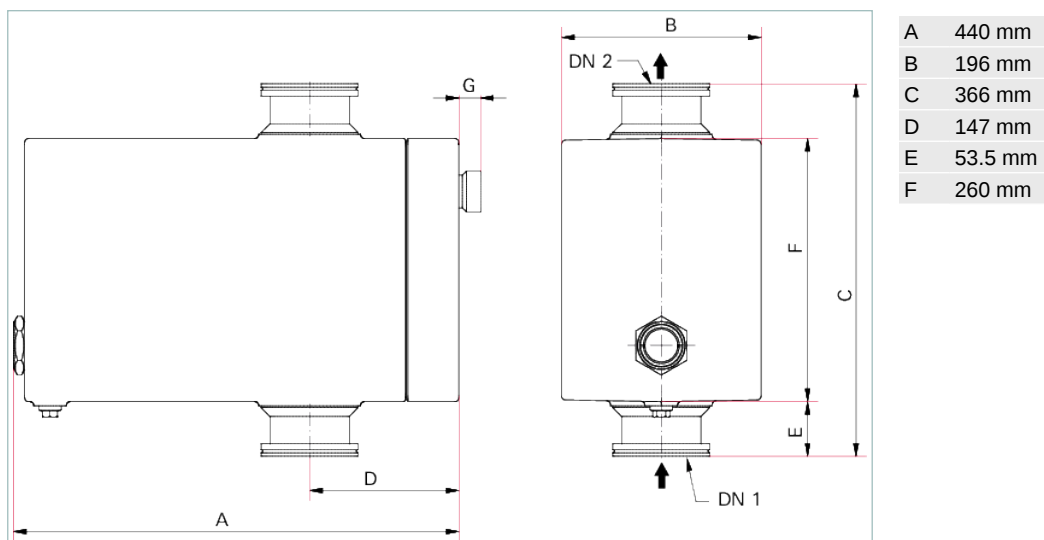

Technical Data	OME 63 M, oil mist separator for pumping speeds up to 135 m ³ /h
Body material	Aluminium
Capacity	1.7 l
Capacity OME with ODK	1.7 l
Cartridge material	Glass mat/polyester
Degree of separation	99.98 %
Exhaust pressure, max.	Atmospheric pressure
Flange (in)	DN 63 ISO-K
Flange (out)	DN 63 ISO-K
For pumping speed up to	135 m ³ /h 79.46 cfm 2,250 l/min
Leak rate	1 · 10 ⁻⁴ Pa m ³ /s 7.5 · 10 ⁻⁴ Torr l/s 1 · 10 ⁻³ mbar l/s
Pressure max. (absolute)	1,500 hPa 1,125 Torr 1,500 mbar
Weight	13.5 kg 29.76 lb

Order number	
OME 63 M	PK Z40 010

Accessories	
Protection Oil return units from oil mist eliminators	
Oil return unit, ODK 005, standard version	PK Z90 065

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.