




AUDIO CRAFT ENGINEERING

MicroMike™ N-Series

HEADWORN MINIATURE MICROPHONE



EASILY ADJUSTABLE AND
FOLDABLE EARCLIP

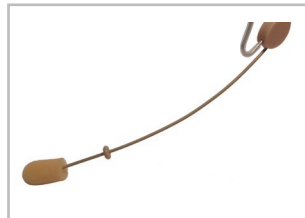

EASILY ADJUSTABLE MICROPHONE
BOOM, RESISTANT TO SWEAT



EXCHANGABLE CABLE



CHOICE OF CONNECTORS

- Superb natural sound quality
- Voice contoured frequency response
- Excellent gain before feedback

- Compatible with leading brands
- Exchangeable cable/connectors
- Comfortable and easy to use

The ACE MicroMike is designed for Broadcast, Live event and Stage Performances. It's ideally suited for vocal sound and speech applications by bringing the microphone close to the mouth.

This will improve gain before feedback by typically 12dB compared to an omnidirectional lavalier microphone. MicroMike is the microphone of choice when you need the highest quality voice pickup without the bulk and appearance of a conventional headset.

The MicroMike N-Series has easily adjustable earclips to fit any head size and shape. The microphone boom length is also adjustable for optimal placement. For a firm and comfortable grip, the earclips are covered with a thin silicone tube.

Extended Frequency Response:

The ACE MicroMike has a wide 20Hz to 20kHz frequency response and is shaped for excellent vocal intelligibility.

Connectors:

Different connectors are available for the leading wireless transmitter brands.


Replaceable Cable:

Inexpensive replacement cables are available. Should the cable break, you easily replace the cable, not the entire microphone.

Protected:

The MicroMike has foldable earclips for easy storage and transportation together with the accessories in the protective soft leathercase.

TECHNICAL SPECIFICATIONS

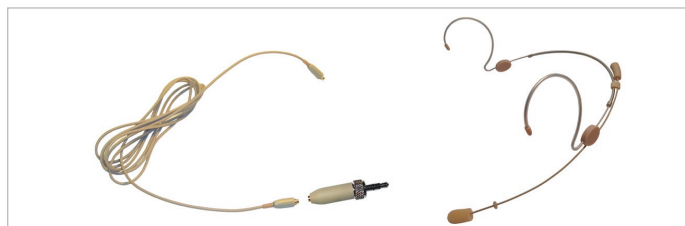

SENNHEISER VERSION



SHURE VERSION




AKG VERSION




MIPRO VERSION

Sensitivity:	$\pm 3 \text{ dB } 5,6\text{mV/Pa}$
Self Noise:	31dB SPL A-Weighted
Overload Level:	140dB SPL
Frequency Response:	20Hz – 20kHz $\pm 3 \text{ dB}$
Operating Voltage:	0,8 – 5V
Polar Pattern:	Omni-directional
Output impedance:	2Kohm

Capsule diameter:	3,2mm
Cable diameter:	1,0mm
Cable length:	1,2m
Weight:	9g
Color:	Light Beige
Accessories:	Windscreen 2pcs
Output connector:	N30: Mini XLR TA3F (AKG) N31: Mini XLR TA4F (Shure) N32: 3,5mm Plug (Sennheiser) N34: Mini XLR TA4F (Mipro) N36: Mini XLR TA5F (Lectrosonics)

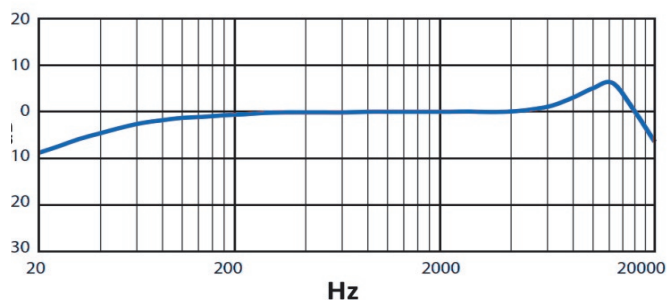

FREQUENCY RESPONSE

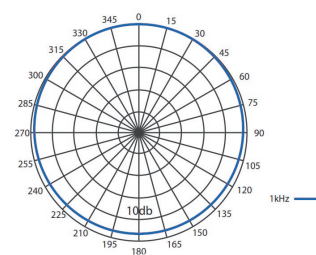

POLAR PATTERN @ 1kHz

ORDERING INFORMATION	
PART NO.	DESCRIPTION
175-1230	N30: Mini XLR TA3F (AKG Type)
175-1231	N31: Mini XLR TA4F (Shure Type)
175-1232	N32: 3,5mm Plug (Sennheiser Type)
175-1234	N34: Mini XLR TA4F (Mipro Type)
175-1236	N36: Mini XLR TA5F (Lectrosonics Type)