



DETAILS




1. The items can be supplied either with adjustable feet or lockable castor
2. Adjustable shelves GN1/1: 4 (N.2 for each door)
3. Curved edge for easy cleaning
4. Unit assembled with thermostatic valve (TX for R134a)
5. Evaporator with anti-corrosion treatment

GENERAL FEATURES

GN1/1 Refrigerated counter (REMOTE ENGINE)	•
Stainless Steel exterior and interior	•
Ventilated Cooling	•
Automatic defrost with electric heater	•
Foaming Agent Cyclopentane (60mm per side)	•
Digital Thermostat	•
Plastic thermal-braker as chamber body frame (Hot pipe system)	•
Door: Self closing and reversible door fitted as standard	•
Removable Gasket	•
Evaporator with anti-corrosion treatment	•
Adjustable shelves GN1/1: 8 (N.2 for each door)	•
N.6 S/S Adjustable feet - (Lockable castor as Optional)	•
Expansion valve/Solenoid Valve set (Optional): for gas R134a	•
Splash back height (100mm)	• 950

SIZES

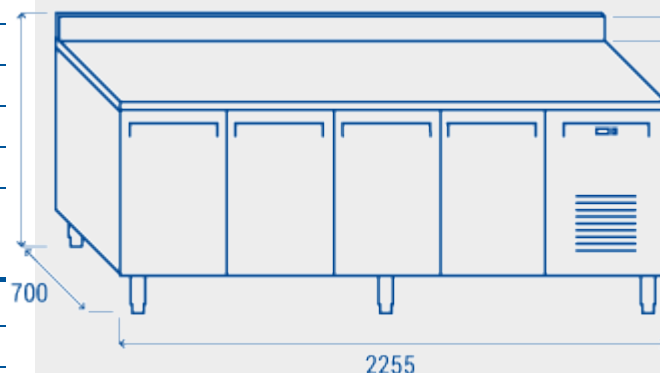

TECHNICAL SPECIFICATION

INNER DEPTH	560 mm
INNER HEIGHT	605 mm
INNER WIDTH	1675 mm
DEPTH	700 mm
HEIGHT	950 mm
WIDTH	2255 mm
KW/24H	N/A Kw
CAPACITY	410 L
NOISE LEVEL	N/A
CONSUMPTION	100 W
NET WEIGHT	154 Kg
TEMPERATURE RANGE	-2° ~ +8°C

CERTIFICATIONS

