



OWNER'S MANUAL

AX-6



6.5" Audiophile Coaxial Speaker

Features:

- *Heavy Gauge Steel Powder Coated Basket
- *High-Energy Y30 Magnets Assures Sufficient Magnet Force Needed For High Sensitivity And Accurate Sound Reproduction
- *Aluminium Cone With Butyl Rubber Surround
- *High Quality Cloth Spider With Polyester Fibre
- *1" High Temperature KSV Voice Coil
- *20mm Silk Diaphragm Tweeter With Ferro Fluid Cooled V.C
- *Custom Competition Grade 6dB Crossover



Model	AX-6
Impedance	4 Ohm
Frequency response	56-20kHz
Efficiency 1W/1M	88dB
Power Handling(RMS)	60W
Power Handling(max)	120W
Linear Parameters(TSP)	
Membrane Material	Aluminium cone
Voice Coil Diameter	1"
Resistance(Re)	3.6 Ohm
Resonance Frequency(Fs)	56 Hz
Mechanical Q factor(Qms)	3.97
Electrical Q factor(Qes)	0.81
Total Q factor(Qts)	0.67
Equivalent air volume Vas	17.8L
Mechanical mass(Mms)	11.2g

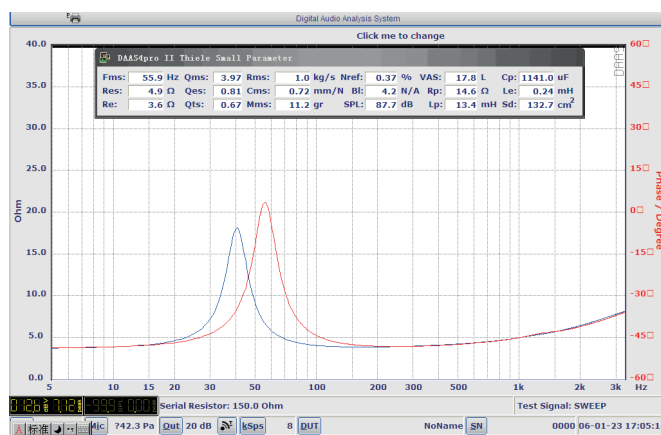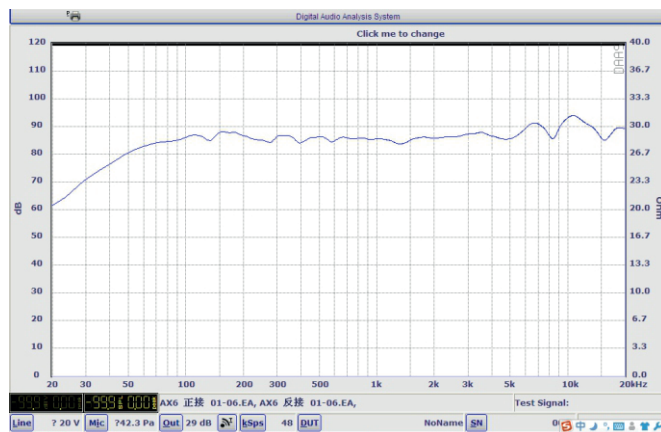



OWNER'S MANUAL

AX-6

6.5" Audiophile Coaxial Speaker

Physical Dimensions:

