


SCHILLING - Aluminum gantry crane

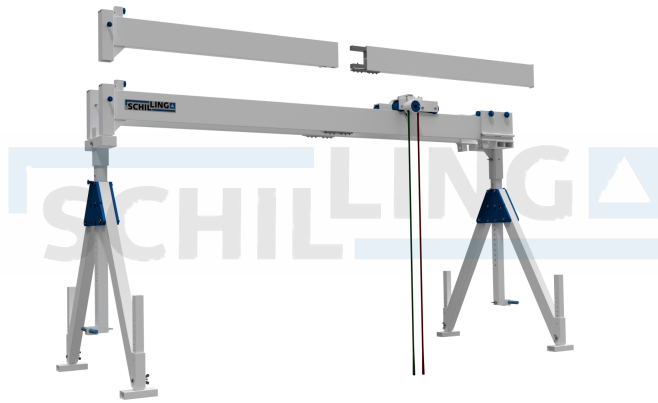

The aluminium gantry crane. Heavy loads, easily moved.

A height- and length-adjustable crane system that offers maximum flexibility thanks to its variable adjustment options.

The SCHILLING aluminium gantry crane can be erected and dismantled in a very short time and with relatively little effort.

No structural modifications (e.g. dowel fastenings or similar) are necessary. Lightweight construction, with extremely high stability.

In the stationary version, the height of the four adjustable feet can be set individually and independently of each other and thus optimally adapted to the local conditions. Absolute stability for all load applications.

suspension point at the bolt of the trolley min. - max. in mm: 1834 - 2884

total height min.- max. in mm: 1934 - 2984

adjustment range of the beam support in mm : 650

adjustment range of the adjustment foot in mm : 400

total adjustment range in mm : 1050

total width of the crane max. in mm: 4244

distance between the lateral stands on the floor max. in mm: 3753

aluminium beam: separable alu double beam

Beam profile in mm: 220x60

total beam length in mm: 4100

usable beam length in mm: 3479

length of the split beam parts in mm : 2000 / 2000

One of the two pieces (with sleeve) can be used as a single double beam.

The following combinations are possible:

1. beam length in mm : 4000

2. beam length in mm : 2000

beam housing 1: sleeve 92x92 with bump stop

beam housing 2: end piece

stand brace profile in mm: 120x80

beam support profile in mm : 81x81

length of the beam support 1 / 2 in mm: 1390 / 1390

Article no.	1511040-10
Execution	stationary
Height	small
Load capacity	1000
Overall width	4244
Side frame distance bottom	3753
Overall height Min.	1934
Overall height Max.	2984
Max. height of hook-in	1834
Max. height of hook-in	2884
Lower edge of beam Min.	1567
Lower edge of beam Max.	2617
Total adjustment range	1050
Side frame weight left	43
Side frame weight right	43

Adjustment range of adjustable foot	400
Trestle strut profile	120x80
Beam support profile	81x81
Beam support adjustment range	650
Beam support length right	1390
Side frame width	1293
Aufsteckstutzen Gewicht	10
Horizontal adjuster Weight	23
Beam weight	101
Number of beams	twice
Carrier version	separable
Carrier Article text	Partially or pluggable double beam
Carrier profile	220x60
Träger Abstand	250
Carrier end left	Sleeve 92x92 with buffer stop
Carrier end right	End strip
Beam profile Overall length	4000
Carrier profile length left	2000
Carrier profile length right	2000
Usable carrier length	3479
Overall beam length	4100

Weight of trolley	18
Total weight	240.0000
Carrier number	70024220604000-10
Carriage number	194122060
Width of trolley	480

- Two lateral stands, foldable
with height-adjustable beam support

grid dimension: 50 mm
- with two height adjustable adjustment feet

grid dimension: 40 mm

The lateral stands can be folded up effortlessly and can therefore be stowed, stored, and transported in a space saving manner.

- One aluminium beam
Separable resp. pluggable aluminium beam.
- One fixable park brake trolley
The trolley is used to hold the chain hoist or alternatively the lifting straps.
Even under full load, the trolley is infinitely adjustable and can be locked in any position.
- Two bump stops
As collision protection for the trolley
- One integrated horizontal adjuster
Through the use of the horizontal adjuster the usable length of the aluminium Gantry Crane can be adjusted smoothly between the two lateral stands.

88045 Friedrichshafen
Germany

Tel.: +49 7541 60404-0
mail@schilling-fn.de